

OVERVIEW	N276
SHOP & SERVICE EQUIPMENT	N278
ELECTRONIC MEASURING INSTRUMENTS	N286
PRESSURE WASHERS	N291
REELS	N292
MATERIAL HANDLING	N294
HYDRAULICS, RAMPS & STANDS	N299
BANDSAWS, SANDERS & GRINDERS	N302
INDUSTRIAL FURNITURE	N308



**FLEET
MAINTENANCE**

A man with short, light-colored hair, wearing safety glasses and a denim shirt, stands in a workshop or garage. He is holding a clipboard with a pen and a small device attached to it. The background shows industrial equipment and a ceiling with lights.

FLEETS THAT RUN LIKE A WELL-OILED MACHINE.

When your fleet is down, so is your business. And when your vehicles are not maintained efficiently, they cost you time, money and productivity. At Snap-on, we understand the vital importance of your fleet operations. That's why no one offers more equipment to keep your fleet up and productive than we do. From diagnostics and shop equipment, to battery maintenance, vehicle fluid management and more, Snap-on has the innovative products that ensure your fleet runs at optimal efficiency.

Upgrade your repair center to first class.

LIFTS

Maximize your repair center's productivity with some of the industry's widest runways, quickest lift speeds and highest lifting capacities. Or, if you're running out of space or need to go to the vehicles, use our mobile column lifts for the flexibility to make the repair.

WHEEL & TIRE MAINTENANCE

We have an award-winning selection of wheel and tire maintenance equipment including aligners, wheel balancers, tire changers and brake lathes that feature cutting-edge technology.

DIAGNOSTICS & INFORMATION

Our diagnostic tools help you get to the heart of the problem quickly. The right software and proper accessories can help you take advantage of all the power your diagnostic tools are designed to deliver.

FACILITIES MAINTENANCE

We have everything your facility needs: shelving, lighting, materials handling, and more. And for metal shops, our workbenches, heavy metal cutting equipment, band saws and other tools and equipment are precision-engineered for critical applications.

MODULAR HIGH-DENSITY STORAGE

Snap-on's Modular Industrial Storage is an innovative, custom-designed storage solution that creates a world-class environment by applying our company's unsurpassed experience and meticulous attention to detail. Stay organized. Stay prepared.

ELECTRIC/HYDRAULIC LIFTS



Electric/Hydraulic Inground Lifts - 9,000 - 15,000 lb. Capacity

Challenger's electric hydraulic cassette style inground EnviroLift® meets the rigorous demands of professional service facilities. With over 50% more bearing contact surface than competitor's lifts, enhanced wipers both top and bottom and larger 8½" chrome pistons, your shop will have a superior, more stable and repeatable lift resulting in increased productivity. These inground lifts also eliminate environmental concerns with a fully contained polymer housing made from recycled plastic.

EnviroLifts require less shop space than surface mounted lifts. With a smaller footprint, your shop will maximize the number of service bays, resulting in higher parts and service revenue. EnviroLift® also creates a professional showroom style appearance with its open, aesthetically pleasing look.

Other standard features include a mechanical locking ladder that engages every 3" and a stainless steel air lock release cylinder to prevent rust associated with condensation. Available in 10,000, 12,000 and the exclusive 15,000 lb. lift capacity.



Stock No.	EV1020	EV1020MP9	EV1020-QC	EV1020MP9-QC	EV1220	EV1520
Lifting Capacity	10,000 lbs.	9,000 lbs	10,000 lbs.	9,000 lbs	12,000 lbs.	15,000 lbs.
Stroke	68"	68"	68"	68"	68"	68"
Rise Height	74"	70 ¾"	74"	70 ¾"	81 ¼"	84 ¾"
Width Overall	110"	79 ½"	110"	31 ½" / 79 ¾"	99"	71 ½"
Drive-Thru Clearance	87"	N/A	87"	N/A	87"	NA
Reach (Arm Minimum)	19 ¾"	31 ½" x 26 ½"	19 ¾"	31 ½" x 26 ½"	32"	26 ¼"
Reach (Arm Maximum)	42 ¼"	79 ½" x 80"	42 ¼"	79 ½" x 80"	49 ¼"	43"
Screw Pad Height	3 ¾" - 6"	2 ¾"	3 ¾" - 6"	2 ¾"	5" - 7 ¼"	6 ½" - 8 ¾"
Capacity (Per Arm)	2,500 lbs.	2,250 lb. capacity	2,500 lbs.	2,250 lb. capacity	3,000 lbs.	3,750 lbs.
Guide Plunger Diameter	8 ½"	8 ½"	8 ½"	8 ½"	8 ½"	8 ½"
Motor/Voltage	2HP, 208v-230v, 60Hz, 1Ph	2HP, 208v-230v, 60Hz, 1Ph	3HP, 208v-230v, 60Hz, 1Ph	3HP, 208v-230v, 60Hz, 1Ph	2HP, 208v-230v, 60Hz, 1Ph	2HP, 208v-230v, 60Hz, 1Ph
Speed of Rise	40 Seconds	40 Seconds	27 Seconds	27 Seconds	48 Seconds	60 Seconds
Air Required	75 - 125 psi	75 - 125 psi	75 - 125 psi	75 - 125 psi	75 - 125 psi	75 - 125 psi

Features & Benefits

- Larger 8½" diameter chrome pistons provides greater stability under load
- Chrome non-breathing ram style cylinder (EV1020 only) minimizes water intake and other contamination
- Enhanced raised wiper at top and bottom of bearing provides better grease retention and minimizes contaminants from entering into bearings
- Over 50% longer bearing contact than competitor lifts provides increased stability
- Stainless Steel air lock release cylinder promotes longer working life with its corrosion resistant design
- Mechanical lock engages every 3" provides safety and allows technician to work at their ergonomic height to increase productivity and minimize fatigue
- Fully contained and sealed recycled polymer cassette tub eliminates risk of hydraulic fluid seeping into the ground
- Double telescoping screw adjusts from 3¾" to 6" with removable rubber pad for frame contact (EV1020 only)
- Wide drive-thru at 87" accommodates wider vehicles, minimizes tire pinching and provides easy drive-on (EV1020 and EV1220 only)

Fight Oppressive Shop Temperatures

The Power Breezer plays a vital role in Occupational Health and Safety Programs. It is a multi-purpose cooling unit that can be utilized almost anywhere.

Power Breezer™ reduces heat related injuries and increases productivity

- Cools up to 3,000 sq. ft. (279m²)
- Reduces temperature by up to 27° F (15°C)
- Water tank can last up to 5 days
- Doesn't get users or equipment wet
- Manages dust and flying insects

Stock No.	Description
BZMGAB10A01	Breezer 0 ₂ , 110V (Gov)
BZMGAB20A01	Breezer 0 ₂ , 220V (Gov)
BZPB10A06B	Power Breezer, 110V (Commercial)
BZPB10A1B	Power Breezer, 110V (Gov)
BZPB20A1B	Power Breezer, 220V (Gov)



Reduces temperatures by up to 27° F

	Breezer 0 ₂	Power Breezer
Oscillation	Yes	Yes
Integrated Water Container	Yes - 40 gallon (151L) Hose connection not required.	Yes - 100 gallon (378L). Hose connection not required.
Operating Time	2-3 days running 10-12 hrs/days	4-5 days running 10-12 hrs/days
Effective Water Vaporization	0.1-.95 Gallon/Hour (0.4L-3.6L/Hour)	0.1-2 Gallons/Hour (0.4L-7.6L/Hour)
Electric Consumption	Avg. Amps: 6 (110V Unit); 4 (220V Unit)	Avg. Amps: 9 (110V Unit); 5 (220V Unit)
Air Flow	7,000 CFM (11,893 m ³ /hr)	14,000 CFM (23,786 m ³ /hr)
Height	35.6" (90cm) stored, 6.3" when mounted (161cm)	46" (116.8cm) stored, 70" when mounted (177.8cm)
Width	26.3" (67cm)	29.5" (75cm)
Depth	37" (94cm) stored, 44.1" (112cm) mounted	42" (107cm) stored, 51.5" (130.8cm) mounted
Weight (without water)	176 lbs. (80kg)	250 lbs. (113.4kg)
Power Source	110V or 220V (Type G Plug)	110V or 220V (Type G Plug)
Highly Durable Castors	8" (20.3cm) and 6" (15.2cm) rugged wheels/locking castors	10" (25.4cm) and 8" (20cm) rugged wheels/locking castors
Hard Case for Shipping and Transport	Yes - Integrated into design	Yes - Integrated into design

OSHA Compliant
ETL Certified (USA and Canada)
NOM Certified (Mexico and some South American countries)

- Optional Accessories**
- BZPB60000501** (Power Breezer Ducting Kit)
 - BZPB60000301** (Power Breezer Cover Set)
 - BZPB600014A** (Power Breezer Head Wrap w/Artwork)



Shown with optional Ducting Kit

FLYBEEET MAINTENANCE



PFM 9.2 DRO 6 Adapter Package

The PFM 9.2DRO is the one of the best selling on-car lathe in the world and loaded with standard features that make it simple to use, fast, and flexible! Essential or required equipment for most OEMs for extreme accuracy, this lathe will also improve shop brake service efficiency dramatically, all while improving customer satisfaction. Stop working on 21st century vehicles, with 20th century equipment!

- **FIT ON EVERY VEHICLE** We have the adapters that will connect you to virtually any vehicle on the road today and the power to turn stiff all-wheel drive and truck axles. And our simple setup is the same from sub compact to heavy duty pick-up truck
- **SERVICE ANY VEHICLE ON ANY LIFT IN 7-9 MINUTES.** Two post, four post, drive-on... it doesn't matter. Pro-Cut's new fixed post trolley allows you to roll up and mount your Pro-Cut lathe with confidence.
- G2X & GYR Compatible

PCI926ADP PFM 9.2 6 Adapter Package

Package Includes:

- **PCI92-BASE-IBT** Lathe, Trolley & Standard Speed Lock Cutting Head
- **PCI50-6ADP** 6 Adapter Package covers 4 lug cars up to domestic ¾ ton trucks
- **PCI50-ACC** Accessory Kit
- 1 Year Warranty Parts & Labor
- Set Up & Training by Pro-Cut Certified Factory Rep
- Access to Trainsmart, our on-line tech training program & Certification

PCIX96ADP PFM X9 6 Adapter Package

The PFM X9 combines our best existing technologies, like patented PFM one button computerized compensation system and 4 wheel-4 axis fully adjustable trolley, and combines them with a rigid new X-Frame lathe chassis, powerful belt driven high torque drivetrain, and super bright 6 LED light to give you a clear path to higher profits! All X9's come with our famous DRO display that includes live run-out, productivity tracking, and lathe diagnostics. X9's are digitally expandable to optional G2X and GYR systems.

- **FIT ON EVERY VEHICLE.** We have the adapters that will connect you to almost any vehicle on the road today and the power to turn stiff all-wheel drive and truck axles. And our simple setup is the same from sub compact to dual wheel trucks.
- **SERVICE ANY CAR ON ANY LIFT IN 6-8 MINUTES.** Two post, four post, drive-on, or even no lift....it doesn't matter! Pro-Cut's fully adjustable trolley allows you to roll up and mount your Pro-Cut lathe with confidence.

PFM X9 6 Adapter Package

Package Includes:

- **PCIX9-BASE-IBT** Lathe, Trolley & Standard Speed Lock Cutting Head
- **PCI50-6ADP** 6 Adapter Package covers 4 lug cars up to domestic ¾ ton trucks
- **PCI50-ACC** Accessory Kit
- 2 Year Warranty Parts & Labor
- Set Up & Training by Pro-Cut Certified Factory Rep
- Access to Trainsmart, our on-line tech training program & Certification



PFM X9

A10 Warthog Commercial Duty Lathe Package

Designed with busy fleets and truck shops in mind, the A10 Warthog is the latest in a long line of precision on-vehicles lathes from Pro-Cut. The Warthog is designed to work on disc brake vehicles from small cars up to medium duty trucks. With these great features:

- Rugged belt drive system that offers nearly 2X the start-up torque of our other lathes - great for all-wheel drive and truck applications.
- Larger (by 8 lbs.) aluminum body casting than our other lathes offers improved vibration dampening and smooth cuts.
- 4-wheel fully-adjustable height trolley works on any lift or no lift at all (if jack stands are all you have), and provides stability and additional storage for tool kit, lug nut kit and other accessories

- The latest PFM Computer and DRO electronics package displays "as cut" lateral run-out, has an hour meter, and keeps track of # of rotors cut. Can be upgraded to G2x Measuring cutting head, and/or full GYR technology package.
- Includes Speed Lock Cutting Head now with 2 position tool arms for larger rotors.
- Full 2 Year Warranty parts and labor!
- Includes Set-up and Training

PCIA106ADP A10 Warthog Commercial Duty Lathe

Package includes:

- **PCIA10-BASE-IBT** Warthog lathe, 4-post trolley and cutting head
- **PCI50-6ADP** 6 Adapter package for 4 lug cars up to 1/2 ton truck
- **PCI50-ACC** Accessory kit



PCI50-6ADP



PCI50-ACC



- Optional - Sold Separately
- **PCI50999KIT** Kit for trucks F650 and larger
 - **PCI50TRKKIT** 3/4 ton to 1 ton single and dual wheel kit




PCI50999KIT



PCI50TRKKIT



- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

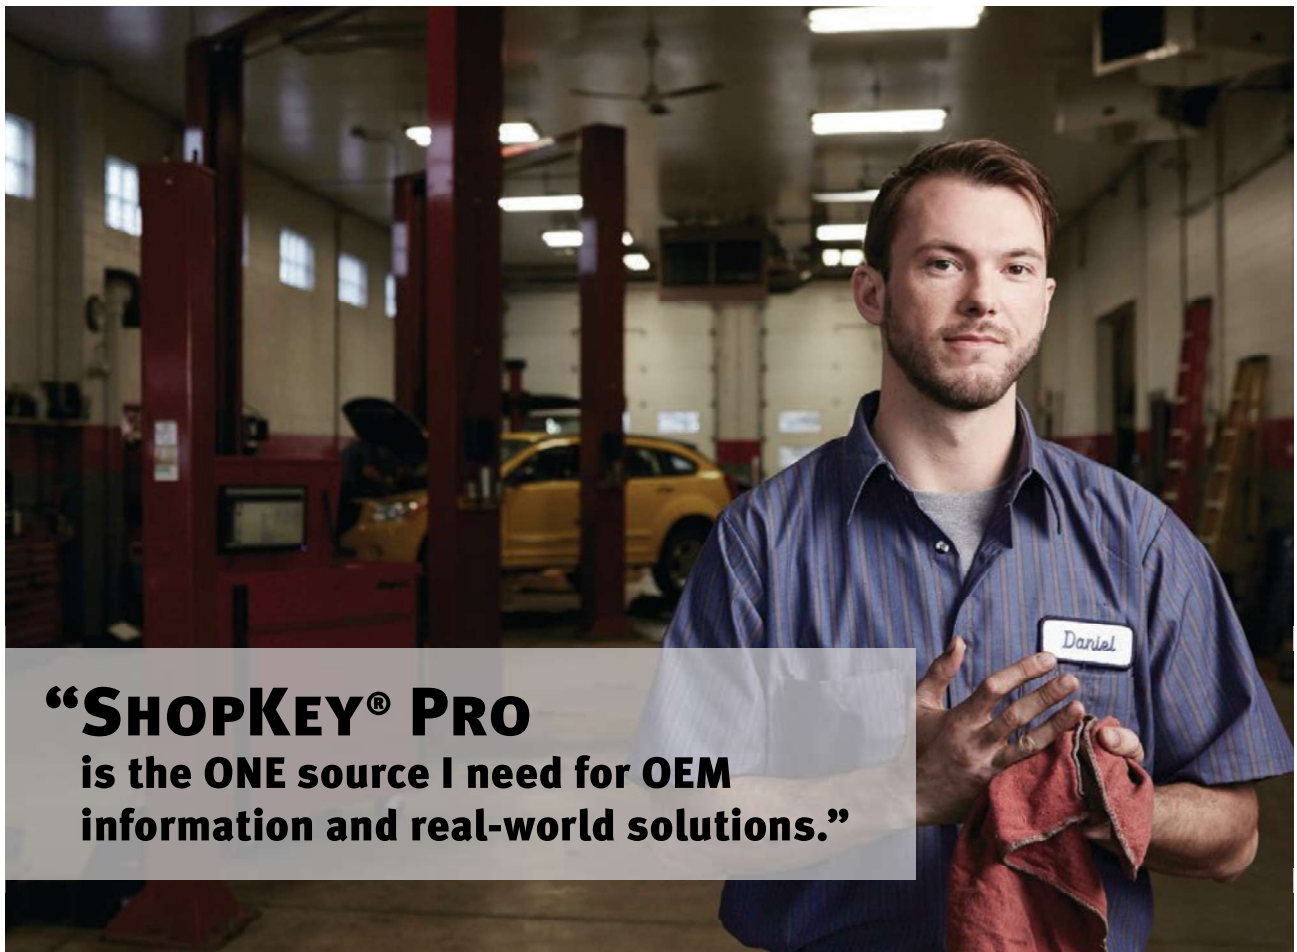

**SHOPKEY® PRO is faster, easier and more intuitive than ever before.
So your shop can be more productive than ever before.**

It's Time to Get More Efficient.

A single lookup in SHOPKEY® PRO gets you there.

Things move fast in an auto repair shop. So, you need repair information tools that work as fast and accurately as you do. That's **ShopKey® Pro**.

From your first look under the hood, **ShopKey® Pro** helps steer you in the right direction for an accurate diagnosis and faster repair. SureTrack®, the diagnostic information set inside **ShopKey® Pro**, delivers Real Fixes based on a database of over 500 million actual repairs completed by professional technicians. Once you've got your diagnosis, it's simple to write an estimate and access all the OEM factory sourced service information to complete the repair.




With the advanced 1Search™ Plus feature, SureTrack® information is fully integrated with the OEM information, making your diagnosis and repair as simple as one lookup. You'll quickly find related TSBs, Real Fixes, specifications, component test information, color wiring diagrams, and removal/replace procedures brought back together for ease of navigation. **ShopKey® Pro** offers the most trusted source of complete OEM and real-world information, integrated together, from one provider.

ShopKey Pro helps make your job easier. That's not only efficient, it's just plain smart.

SHOPKEY® PRO is faster, easier and more intuitive than ever before. So your shop can be more productive than ever before.

FEATURES TO INCREASE YOUR PRODUCTIVITY

- 1Search Plus**
 Our latest innovation to improve your information lookup, 1Search™ Plus returns information in a unique graphical layout aligned with the way a technician thinks about diagnosis and repair. OEM and real-world information are fully-integrated, reducing your navigation time. All results are returned in more specific categories, leading you directly to the information you want and cutting out the clutter.
- Color Wiring Diagrams**
 Trust our industry-leading wiring diagrams to track down circuits quickly and accurately – consistent formatting across all OEMs eliminates guesswork.
- Mobile-Friendly**
 Access your repair data right at the vehicle – where you need it most, at no additional cost.
- Latest TSBs**
 Never miss a TSB! Access the most accurate and up-to-date database of TSBs available, most delivered within one month of publication by OEM.
- Quick Links**
 Speed up your searches even more with a Quick Links menu that takes you directly to the most commonly sought information in ShopKey® Pro, including fluids, tire fitment, wiring diagrams, component locations, DTCs and TSBs.
- Top 10 Repair List**
 Get a jumpstart to an accurate diagnosis with the “Top 10 Repairs” dashboard. With every lookup in ShopKey® Pro, you see the most common components, codes, symptoms and lookups for your current vehicle.
- Estimating Integrated with Manager™ SE**
 Build accurate, profitable estimates quickly and easily with the only OEM repair information system integrated with the industry’s most trusted shop management system.

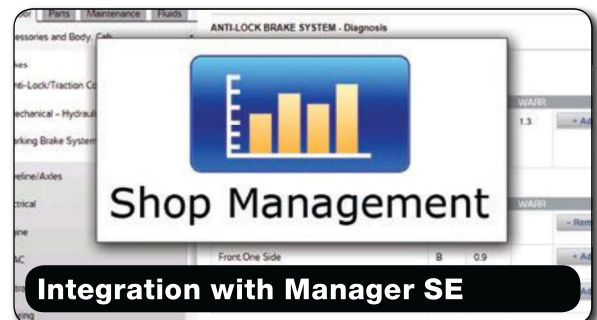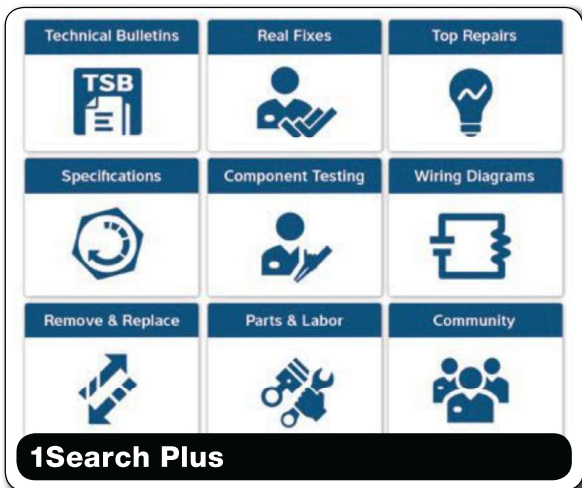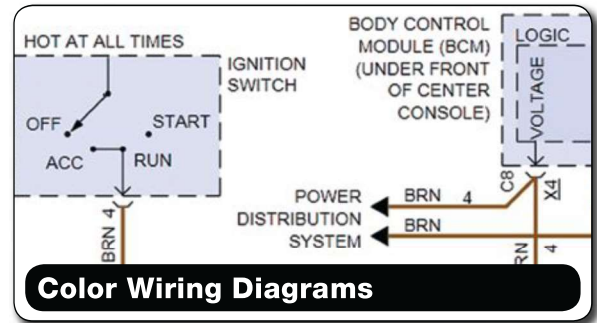

IPA SPECIALTY EQUIPMENT



Diagnostic Trailer Testers



STMIL0650



STMIL0649



IPA9007A

9102



Quickly troubleshoot lighting, air brakes and ABS systems with the industry's leading trailer testers. The intuitive and durable designs are ideal for both on and off-site trailer repairs.

Description	Stock No.	Connection Type	Weight	Dimensions L x W x H
NATO MUTT®	STMIL0650	MS 75021-2 NATO/ 7 Round pin (SAE J560)	52 lbs.	14" x 10" x 28"
NATO MUTT® and Accessory Kit	STMIL0625	MS 75021-2 NATO/ 7 Round pin (SAE J560)	62 lbs.	14" x 10" x 28"
Super MUTT® Deluxe Edition	IPA9008DL	7-Way Round Pin	52 lbs.	14" x 10" x 28"
Super MUTT® Head	IPA9005A	7-Way Round Pin	26 lbs.	16.5" x 10.5" x 11.5"
Smart MUTT® (7 Round Pin)	IPA9007A	7-Way Round Pin	15 lbs.	16.5" x 9.5" x 9"
Smart MUTT® (7 Spade Pin)	IPA9004A	7 Way Flat Pin	15 lbs.	13.5" x 9.5" x 9"
Mini MUTT®	IPA9003A	7 Way Flat Pin	15 lbs.	13.5" x 9.5" x 9"
Heavy Duty Ranger MUTT®	IPA9102	7-Way Round Pin	2 lbs. (Empty)	12.25" x 5.25" x 7.25"
Light Duty Ranger MUTT® Trailer Tester	IPA9101	7-Flat, 6-Round and 4/5-Flat Pin	2 lbs. (Empty)	12.25" x 5.25" x 7.25"

Description	Stock No.	Includes
Trailer Tester Accessory Kit	STMIL0649	12 ft. NATO Cable, 7 Flat/7 Round Adapter, Master Trailer Cleaner Kit, 7 Round Circuit Tester, 7 Flat Circuit Tester, 6 Round Circuit Tester, 4/5 Pin Tester, 3 Way Trailer Adapter

FUEL/FLUID TRANSFER AND FILTRATION



IPA9040F

IPA9049M Fleet Tank Sweeper (120v AC)

Lightweight and Portable Filtration System for Tank Applications Including Trucks, Tractors and 55 Gallon Drums

Pump Type	Pump Req.	Flow Rate	Intake	Output	Filter	Weight	Dimensions
Rotary Vane	120V AC (6.5 Amp)	20 GPM	3/4" Diameter	1/2" Diameter	10 Micron Water Blocking	32 lbs.	L: 12" x W: 13" x H: 20"

IPA9046F Fuel Tank Sweeper (Pneumatic)

A Complete Turnkey Solution for Transferring, Polishing, Blending and Filtering Fuel

Pump Type	Pump Req.	Flow Rate	Intake	Output	Filter	Weight	Dimensions
Pneumatic Diaphragm	4 CFM at 22-102 PSI	26 GPM	1" Diameter	1" Diameter	10 Micron Water Blocking and 30 Micron Particulate	70 lbs.	24"W x 42"H x 14"D

IPA9046H Hydraulic Oil Tank Sweeper (Pneumatic)

Battery Powered, Mobile Filtration System for Use in Fuel Islands, Vehicle Recovery and Fleet Operations

Pump Type	Pump Req.	Flow Rate	Intake	Output	Filter	Weight	Dimensions
Pneumatic Diaphragm	4 CFM at 22-102 PSI	26 GPM	1" Diameter	1" Diameter	10 Micron Water Blocking	70 lbs.	24"W x 42"H x 14"D



IPA9070

IPA9070 Def Transfer System (120V AC)

Professional Grade Turnkey Kit for Automotive and Fleet Shops

Pump Type	Pump Req.	Flow Rate	Intake	Output	Nozzle Type	Weight
Rotary Diaphragm	120V AC (6.5 Amp)	9 GPM	6' Long 3/4" Diameter	8' Long, 3/4" Diameter	Manual (non-automatic shutoff)	15 lbs.
Rotary Vane	120V AC (6.5 Amp)	9 GPM	6' Long 3/4" Diameter	6' Long 3/4" Diameter	Manual (non-automatic shutoff)	15 lbs.

The Industry's fastest, most advanced, heavy duty scan tool for engine, transmission & brake systems including ABS & more.



Pro-Link® Ultra
Military Diagnostic Scan Tool
Powerful Portable Diagnostics -
Includes adaptors typically used
on most military type vehicles
ULTMILKITB

- Features 8.5" full color class LED sunlight-readable display
- Diagnose commercial vehicles from light duty to Class 8 trucks
- Ability to read live vehicle data from multiple vehicle component systems
- Read active fault codes, read and clear inactive fault codes, monitor engine, transmission, brake data and view trip information with included software
- Optional OEM applications allow the user to configure the fleet to operate within desired standards and protocols
- View how a vehicle is operated and being driven
- Upgradable - USB ports allow for future updates/upgrades, and also has the ability to print or transfer files to external memory
- Includes Pro-Link® Ultra Scan Tool, Heavy Duty Standard Software Suite* (see charts), one data cable, 4800 mAh battery, one screen protector, assorted adapters (see charts) and 1-Year warranty
- Also includes rugged carrying case with protective foam inside for diagnostics on or off site, plus software and adapters listed

Included Software:

Stock No.	Description
EEHD864018	DDEC Suite: DDEC 6, 10, 13 (2007)
EEHD864015	DDEC Suite: DDEC II, III, IV, V v2
EEHD864031	Detroit Diesel® MBE
EEHD864024	CAT® ACERT™ 2.0 (2003–2009)
EEHD864027	CAT® Electronic Engines (1990–2003)
EEHD865009	NAVISTAR® MaxxForce® v3 (2007–Present)
EEHD864010	International® Engines 2.0 (1994–2006)
EEHD864041	NAVISTAR® Body and Chassis
EEHD865005	Allison® Transmission Suite: GEN 5, GEN 4, 1K/2K, WTEC, CEC 1
EEHD865014	Meritor WABCO® Suite: Air, Hydraulic, and OnGuard™ CMS v2
EEHD864013	Bendix® Air ABS
	Heavy Duty Standard Suite: HDS J1708, HDS J1939, and OBD II/EODB (2002–Current)
ULTHMMWVSW	HMMWV Transmission, Light and Medium Trucks (LMT), Enhanced Ford®, GM®, and Isuzu® (1996–2016)
EEHD864021	Trailer ABS Software Suite: Wabash®, Haldex®, Eaton®
EEHD867011	Volvo® - Mack® v2 (2007–2017)
EEHD867003	Cummins® (2007–2017)

Included Accessories:

Stock No.	Description	Stock No.	Description
EEHD493028	9-Pin Deutsch Adapter	EEHD493015	CAT® 9-pin Adapter
EEHD494024	6-Pin Deutsch Adapter	EEHD509011	NATO Adapter
EEHD493013	OBD-II/J1962 Adapter	EEHD493018	HMMWV Adapter
EEHD493003	12-pin Adapter	EEHD494099	110V AC Power Adapter
EEHD493033	3-pin Deutsch/2-pin Cummins® Adapter	EEHD2450801	Screen Protector
		EEHD215014	Carrying Case and Foam Insert

Optional Accessories:

Stock No.	Description
EEHD604020	Universal J560 PLC Adapter
EEHD424001	J560 PLC power adapter



- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

FACILITIES MAINTENANCE



Fuel Gas and CO Analyzers

SPECIFICATIONS / MODEL	TPI709A740	TPI712A740	TPI716	TPI716N
CO Measurement	0-10,000 ppm	0-10,000 ppm	0-10,000 ppm	0-10,000 ppm
O2 Measurement	0-25%	0-25%	0-25%	0-25%
NO Measurement	n/a	n/a	n/a	0-5,000 ppm
NOx (Calculated)	n/a	n/a	n/a	0-5,250 ppm
CO2 Measurement	0-25%	0-25%	0-25%	0-25%
CO/CO2 Ratio	0 to 0.999	0 to 0.999	0 to 0.999	0 to 0.999
Combustible Leak Indication	no	no	yes	yes
Pressure	yes	yes	yes	no
Pressure Differential	yes	yes	yes	no
Stack Temp (CH1)	yes	yes	yes	yes
Ambient Temp (CH2)	yes	yes	yes	yes
Temperature Differential	yes	yes	yes	yes
Excess-Air	yes	yes	yes	yes
Air-Free (CO)	yes	yes	yes	yes
Efficiency	yes	yes	yes	yes
Store Memory	50	50	50	50
Logger Memory	no	yes	yes	yes
IRDA (optional)	no	yes	yes	yes
Battery	3 "AA" batteries	rechargeable	rechargeable	rechargeable
Standard Accessories Included	TPI709 Analyzer, flue probe, silicon tubing, beaded temp probe, brass fittings, carrying case and TPIA740 printer	TPI712 Analyzer, flue probe, silicon tubing, beaded temp probe, brass fittings, carrying case and TPIA740 printer	TPI716 Analyzer, flue probe, silicon tubing, beaded temp probe, brass fittings, combustible gas probe, carrying case	TPI716N Analyzer, flue probe, silicon tubing, beaded temp probe, brass fittings, combustible gas probe, carrying case



**TPI709A740 / TPI712A740
TPI716 / TPI716N**

Choose from a complete line of flue gas and CO analyzers. Calculate CO2, gross or net efficiency and excess air. All units measure CO, O2 pressure, temperature and, depending on the model, NOx.

NOTE: When selecting oil as fuel be sure to use the optional TPI773 oil filter or reading could become erratic.

TPI750A Refrigerant Leak Detector

- 0.2 ounces per year sensitivity
- Detects all existing refrigerants and blends including 404A, PURON, R507 (AZ50), 1234YF
- 400 hour sensor life under normal use
- Easy one-hand, thumb wheel operation



TPI750A

TPI753A Refrigerant Leak Detector

- 0.1 ounces per year sensitivity
- Detects all existing refrigerants and blends including 404A, PURON, R507 (AZ50), 1234YF
- 400 hour sensor life under normal use
- Pump driven: finds and clears quicker for finding leaks faster



TPI753A

TPI621C3 Manometer Kit

- Measure high efficiency gas and oil equipment pressure to make proper adjustments and maximize efficiency
- Kit includes:
 - TPI621 with resolution of 0.001" of H2O
 - Range of ±120" of H2O
 - TPIA612 protective tilt stand boot
 - (2) TPIA605 ¼ inch tapered "T"s
 - (2) TPIA603 brass fittings (1/4 inch NPT to ¼ inch barb)
 - TPIA774 (six foot of silicone tubing)
 - (2) TPIA776 static tips
 - Carrying case.



TPI621C3

TPI1010A IAQ Meter

- Calculate percent outside air to maintain acceptable
- CO2 levels in buildings and work spaces
- Print test data with date and time stamp using optional A740 printer
- Measure and display Carbon Dioxide (CO2) and Carbon Monoxide
- Measure ambient air temperature
- Measure relative humidity, dewpoint and wet bulb
- Log up to 10,000 readings in 1second to 1 hour intervals
- Download to computer via optional TPIA368 USB cable



TPI1010A

TPI343C1 Digital Thermometer

- Auto field calibrate in less than 10 seconds
- TPI343 can measure -58 to +2,462° depending upon the probe used
- Durable TPICK21M pipe clamp probes for one hand operation on suction lines
- T1, T2, T-differential, Min, Max, Data hold, and selectable C/F°
- Comes with tilt-stand, protective boot, two TPICK21M, and TPIA340 soft pouch



TPI343C1

TPI376C1 I/R Contact/ Non-Contact Temp Tester

Combines IR with contact temperature measurement. Includes:

- TPI376 IR Thermometer Temp. Range: -58°F to 950°F (-50°C to 510°C)
- TPIGK13M K-type probe
- TPIHK11M handle
- TPICK15M HD surface probe
- TPIGK16M air probe
- TPIGK13M chisel probe
- TPIA905 carrying case



TPI376c1

TPI381A, TPI383A, TPI384A Dual IR Contact and Non-Contact Temp Tester

Measures surface temperature without the use of a probe.

- Easy to use single button operation
- 0.1 resolution for best reading (380/381)
- Last reading held for 30 seconds
- Large, easy to read backlit display
- °C and °F selectable
- Temperature ranges:
 - TPI381: 0°F to 572°F (-18°C to 300°C)
 - TPI383: -31°F to 999°F v (-35°C to 560°C)
 - TPI384: -4°F to 1,832°F (-20°C to 1,000°C)



TPI381A

TPI575C1 Dual Air Velocity Meter

- Vane: Air flow 0.4 to 25 m/s (Also reads km/s, ft/min, knots/h, miles/h)
- Hotwire: Air flow 0.2 to 20 m/s (Also reads km/s, ft/min, knots/h, miles/h)
- Temperature -5 to 175° F (-20 to 80°C).
- Data record function for maximum and minimum temperature and air velocity readings
- Data hold and auto power off
- Protective boot and soft carrying case included



TPI575C1



FACILITIES MAINTENANCE

FACILITIES MAINTENANCE



TPI9041

TPI9041 Vibration System Tester

- High level vibration analysis
- Automatic reporting and alerts for designated setting levels
- C-Trend software to store and analyze vibration, lubrication, temperature, oil pressure, etc.



TPI605

TPI605 Digital Vacuum Meter

- Measure vacuum 15 to 12,000 microns
- Display updates every 0.5 seconds
- Read vacuum in seven international units of measure: microns, PSI, inHg, mBar, Pascals, Torr, and mTorr



TPI9080K1

TPI9080K1 Vibration Testing Kit

- Identifies bearing problems with BDU reading
- Identify Balance, alignment, and looseness problems
- Asset management and trending
- Accelerometer included



TPI775

TPI775 Combination CO/Combustible Gas Detector

- Combo ambient CO measurement and combustible gas leak detector
- One-hand easy to use
- Auto and manual zero
- Adjustable tic rate
- Audible & visual alarms



TPI9070

TPI9070 Smart Vibration Meter

- ISO Built-in Alarms
- Identify bearing problems with BDU Reading
- Identify balance, alignment, looseness problems with our built in band filters
- 800 line FFT (spectrum)
- Ruggedized IP67 case
- 3-year Limited Warranty
- Full Color OLED Display
- Built-in accelerometer with interchangeable stinger and magnetic mount



TPI720B

TPI720B Combustible Gas Detector

- Similar to TPI775 but without Co-Detection

WATER TESTING



TPI395A

TPI395A Refractometer

Accurately measures the freezing point of fluids used in hydronic heating systems. Measures propylene, glycol, ethylene, battery fluid, and DEF



TPI397

TPI397 pH Meter - Pen Style

- Wide pH range of 0.10-14.00pH covering most applications
- Operating temperature from 40 -120 °F (5 - 50 °C) allows for temperature compensated readings
- Waterproof design protects the meter
- Low power consumption extends battery life for low operation costs and reliability
- Auto-off function turns power off



TPI390A

TPI390A Total Dissolved Solids Meter

- Test make-up water to prevent scale formation, corrosion, and embrittlement
- Test condensate water in cooling tower/humidifier reservoir applications to prevent bacterial growth
- Reduce water and chemical consumption in boilers and cooling towers
- Prevent low quality wet steam generation in boilers due to foaming

FOR TECHNICAL OR APPLICATION QUESTIONS CALL 800.368.5719

UNIVERSAL COAX CABLE CONNECTOR KITS



TPI3000A
30 Piece
Standard Universal
Connector Kit



TPI5000A
40 Piece
Master Universal
Connector Kit



TPI5010
Universal
Adapter Cable
Kit (RG58)

Universal Connector Kits provide the exact adapters you need for mating or repairing coax cables. Quickly and easily make repair fittings yourself with the proper ends and the threaded "Universal Interface" connector. Connectors screw together in seconds without soldering or crimping. The machined brass connectors are silver or zinc plated with gold plated connector tips and insulated with teflon seals. Use the components you need, then reorder as needed to keep the kit ready for your next custom connector project. All components are available from Snap-on Industrial.



Adapter end + Universal Interface + Adapter end = fast and easy coaxial cable repair

Standard kit offers basic selection of connectors. Master Kit includes all of the Standard Kit components plus T-connectors, Banana connector and BNC connector. Ideal for computer, video and military field work.



- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

FACILITIES MAINTENANCE



TPI194 50,000 Count True RMS Digital Multimeter: CATIII 1,000VAC, CATIV 600VAC

- Large 50,000 count display increases resolution and improves accuracy (1.7" x 2.75", 43mm x 70mm)
- Triple Display shows more than one reading simultaneously
- 51 Segment Analog Bar Graph to catch fast AC fluctuations
- Back Light (LED Type) allows viewing in any light condition
- Auto Range automatically selects the best range for the measurement
- Separate battery and fuse compartment for easy replacement
- AC voltage and amp waveforms found on controls and circuits
- Capacitance measures the value of capacitors
- Diode Test displays approximate forward bias voltage
- Continuity and buzzer to check for opens and shorts
- Time Stamp Logging logs up to 100 readings (min/max/avg)
- Pulse Width measures the duration of a pulse
- Duty Cycle displays the total "on" time of a component
- Inductance measures the value of inductors and coils

Applications:

- Power Quality
- Industrial Motor Controls
- View waveform to verify power equality delivered to variable speed drives.
- Measure voltage and frequency at the same time
- 400µF to check motor start and run capacitors
- DC µAmps for checking flame safety controls
- DC mV for checking thermocouples



TPI194

TPI196 50,000 Count 0-24mA

- Large 50,000 count display increases resolution and improves accuracy (1.7" x 2.75", 43mm x 70mm)
- 0-24mA output for process controls
- Triple Display shows more than one reading simultaneously
- 51 Segment Analog Bar Graph to catch fast AC fluctuations
- Back Light (LED Type) allows viewing in any light condition
- Auto Range automatically selects the best range for the measurement
- Separate battery and fuse compartment for easy replacement
- Continuity and buzzer to check for opens and shorts
- Includes protective boot and silicone rubber (CAT IV 600V) test leads

Applications:

- 4~20mA Transducers
- Valve Positioners
- Signal Conditioners
- Process Scaled Indicators
- Temperature, Flow, Level
- Loop Powered Isolators
- Two Wire Transmitters



TPI196

Accessories For: TPI440 & TPI194

Stock No.	Description
TPIA402	PC software and RS232 cable for TPI440
TPIA403	Protective boot for TPI440
TPIA900	Soft zipper carrying case for TPI440 with shoulder strap
EETA503C	Low current adapter for TPI440, TPI460, TPI192/TPI194
EEDM5030	Current shunt adapter for TPI440, TPI460, TPI192/TPI194
TPIA312	Dual input temperature adapter for TPI440, TPI460, TPI192/TPI194
TPIA251	400 AC mV output adapter for TPI440, TPI460, TPI192/TPI194
EETA501C	400 AC/DC amp adapter for TPI440, TPI460, TPI192/TPI194
EETA502C	1,000 AC/DC amp adapter TPI440, TPI460, TPI192/TPI194

TPI440 Single Trace, 1MHz Oscilloscope with True RMS Digital Multimeter

- Auto Ranging 4,000 Count True RMS DMM: The TPI440 has 9 measurement functions and 0.3% basic DC accuracy
- 1 MHz Single Trace Oscilloscope: View industrial power signals such as motor controls, and switching power supplies with detail and clarity
- Trend Mode: Graph readings over a predetermined time period to check for surges or dropouts
- Component Test: Check voltage-current signatures on resistors, capacitors, and semiconductors
- Logic Test: Indicates transitions up to 2MHz
- Frequency Counter: Measure low frequency signals from 1Hz to 2MHz and display duty cycle, pulse width and period

Applications:

- Power Quality
- Industrial Motor Controls
- View waveform to verify power equality delivered to variable speed drives
- Measure voltage and frequency at the same time
- 400µF to check motor start and run capacitors
- DC µAmps for checking flame safety controls
- DC mV for checking thermocouples



TPI440

TPI270 Clamp-on Ammeter

- Measure motor in-rush & run current. Measure temperature differential with relative mode using any K-type probe (no adapter required)
- Non-contact voltage tester function
 - Slim jaw and body design for use in crowded electrical panels
 - Up to 400 AC amps with 0.01 resolution
 - Capacitance, Hz, VAC, VDC, Ohms, and continuity



TPI50 AC Voltage Tester

- Non-contact voltage detector
- 50 to 1,000 volts
- Audio and visual alert
- Always on, no switch required
- UL listed



TPI50

TPI500 Resistance Tester

- Digital Insulation Resistance Tester with AC Volts.
- Insulation Resistance Ranges: 20MΩ, 200MΩ, 2000MΩ
 - Test Voltages: 250V, 500V, 1000V
 - Continuity Ranges: 2Ω, 20Ω



TPI500

TPI510 Solar Irradiance Meter

- Measures maximum solar energy angle
- Displays results in W/m² or BTU
- Range of 0 to 1999 W/m² or 0 to 634 BTU
- Min/Max and Data Hold functions



TPI510



INT2408PMIL

INT2408PMIL Military Battery Charger and Maintainer Post

- 4 battery chargers through one 110V connection on a 4-wheeled, stable steel base
- Each battery charger features a 25 ft. cord with NATO adapter, 24V system, 8-Amp charger
- Patented “3 Stage Plus” charging technology eliminates undercharging, overcharging, or damage to the battery
- Charger provides batteries with exactly the amount of charge they need
- Whether it’s a liquid electrolyte, absorbed electrolyte, deep cycle, or gelled type battery, you’ll never need to fear overcharging or undercharging again
- Proportional timing technology ensures that the battery is receiving the proper amount of charge
- Externally mounted temperature compensator will dynamically adjust output voltage based on ambient temperature



KBI800030



KBI800031

KrinkingKART™

The heart of the KrinkingKART™ is a KAPower® supercapacitor. The KAPower® supercapacitor is initially energized from the vehicles electrical system. KAPower® then stores energy until needed. It has a long service life of 500,000 + cycles and will outlast the vehicle it is jump-starting. The KAPower® is virtually unaffected by cold temperatures and is maintenance free.

	Automotive	HD Commercial	HD Industrial	Military	HD Industrial	Military
Stock No.	KBI800033	KBI8000030	KBI8000031	KBI800032	KBI800035	KBI800036
Capacitor	12 Volt	12 Volt	24 Volt	24 Volt	12/24 Volt (Dual Voltage)	12/24 Volt (Dual Voltage)
Engines Up To	10 Liter	15 Liter	18 Liter	18 Liter	18 Liter	18 Liter
Auxiliary Connector	HD Booster Clamp	HD Booster Clamp	HD Booster Clamp	NATO	HD Booster Clamp	NATO/HD Booster Clamp
Cable Length	7.5 Feet	7.5 Feet	7.5 Feet	12 Feet	7.5 Feet	7.5 Feet
Cable Gauge	4/0	4/0	4/0	4/0	4/0	4/0
Dimensions	41" x 25" x 19"	41" x 25" x 19"	41" x 25" x 19"	41" x 25" x 19"	41" x 25" x 19"	41" x 25" x 19"
Weight	99 lbs	106 lbs	106 lbs	112 lbs	115 lbs	115 lbs

Heavy Duty Jump-Start Carts Giving An Engine The Power It Needs To Start.



- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4



SOLVING THE CRITICAL.



Multi Fuel Hot Water Pressure Washer

- Extreme durability and portability in a multi fuel diesel engine driven package
- Triplex plunger pump with ceramic plungers and stainless steel valves
- Adjustable pressure
- Adjustable Thermostat
- Chemical Injection
- Trigger Gun with 50' non marking hose
- Dual wand with side handle and detergent tip
- Quick change tips in 0°, 15°, 25° and 40°
- Powder coated frame with wand/hose rack
- 13" tires
- Schedule 80 coil with stainless cold wrap
- Rust free burner fuel tank
- Oil fired burner uses diesel fuel JP8
- All hot water machines must be properly vented if operated indoors
- Fully portable, no electricity required, equipped with 12 volt oil fired burner
- Thermal relief valve on pump
- Group 24 battery not included



Stock No.	PSI/bar	GPM/lpm	HP/cc	Voltage/Engine	Phase/Fuel Tank Cap.	Burner Fuel Capacity	Dimensions	Ship Weight
CAM3000QD	3000/207	4/15.2	10 H.P.	Diesel	5.3 Quarts	9 Gallon	54"L x 32"W x 49"H	650 lbs.

Diesel Powered Skid

- For long hours of dependable operation in the most demanding applications
- Triplex plunger pump with ceramic plungers and stainless steel valves
- Adjustable pressure
- Thermal relief valve
- Chemical Injection
- Trigger Gun with 50' non marking hose
- Heavy duty 36" wand with quick change tips in 0°, 15°, 25°, 40° soap tip
- Powder coat frame
- Group 24 battery not included on E/S models



Stock No.	PSI/bar	GPM/lpm	HP/cc	Voltage/Engine	Phase/Fuel Tank Cap.	Pump Max Temp	Dimensions	Ship Weight
CAM4000D	4000/276	4/15.2	14 H.P.	Diesel E/S	7.4 Quarts	160° F	36"L x 30"W x 30"H	300 lbs.
CAM5000D	5000/345	4.5/17.1	20 H.P.	Diesel E/S	7.4 Quarts	160° F	36"L x 30"W x 30"H	500 lbs.

Hot Water Trailer Models

- Combines durability, versatility with portability - Everything at your fingertips for the toughest cleaning jobs!
- Triplex plunger pump with ceramic plungers and stainless steel valves
- Adjustable pressure unloader valve
- Adjustable Thermostat
- Chemical Injection
- 100' x 3/8" hose on manual reel
- 150' x 5/8" garden hose for tank refill and a manual reel
- Trigger Gun with 100' hose
- Dual wand with detergent tip
- Quick change tips 0°, 15°, 25° and 40°
- Powder coat frame and trailer
- Trailer has full diamond plate deck, lights and is road ready
- Schedule 80 coil with cold wrap
- Oil fired burner uses diesel fuel or kerosene



Stock No.	PSI/bar	GPM/lpm	HP/cc	Engine	Water Tank Capacity	Engine Tank Capacity	Burner Fuel Capacity	Dimensions	Ship Weight
CAMCBG4055DT	4000/276	5.5/20.9	20 H.P.	Hatz Diesel	300 Gallon	5 Gallon	9 Gallon	186"L x 74"W x 72"H	2,200 lbs.
CAMCBG3055DT	3000/207	5.5/20.9	14 H.P.	Hatz Diesel	300 Gallon	9 Gallon	9 Gallon	186"L x 74"W x 72"H	2,200 lbs.



• Read and follow all safety messages in instructions
 • Read safety precautions on pages W1 to W4

SHOP ORGANIZATION



Compact Spring Retractable Hose Reels

Compact, lightweight professional grade spring rewind hose reel that is small enough to do heavy-duty jobs where space or budget is limited.

- Heavy gauge 12GA steel base & support post
- Brass NPT swivel inlet machined from solid
- CoxComposite™ Hub that integrates a high strength composite with self lubricating bronze bearings
- CoxComposite™ Grommet with continuous radius design that does not pinch or catch the cord during operation

Stock No.	Hose I.D., Inches	Hose O.D., Inches	Hose Length, Feet	Maximum Pressure, PSI	Weight
CXRLGLP115	1/4"	1/2"	15'	300	9
CXRLGLP125	1/4"	1/2"	25'	300	11
CXRLGLP310	3/8"	2 1/32"	10'	300	9
CXRLGLP320	3/8"	2 1/32"	20'	300	11



Spring Retractable Hose Reels

Performance and Super-Hub™ (dual axle support system for extra stability) Series - Perfect to pull the hose out of the way in work shop areas and utility vehicles. Can be wall, ceiling, floor or vehicle mounted. T (Truck) Series - Ideal for stationary and mobile units such as service trucks featuring air compressor or product tank.

- Heavy gauge 1/4" steel base & support post
- Factory-matched cartridge-style spring motor
- Brass NPT swivel inlet machined from solid
- 1" solid steel axle with 1" lubricated precision bearings
- Guide arm adjusts to wall, floor & overhead positions
- SH, MP & HP Series features dual axle support with Super Hub™
- T Series features triple axle support with a full frame & Super Hub™
- Choice of Standard or EZ-Coil® Models



In 2000 Coxreels developed EZ-Coil®, a patented safety system that retracts up to 80% slower than conventional reels. EZ-Coil® is an exclusive Coxreels feature protecting your facility, property & most importantly yourself! NOBODY SHOULD BE WITHOUT EZ-COIL®!

Standard Stock No.	EZ-Coil® Stock No.	Series	Hose I.D., Inches	Hose O.D., Inches	Hose Length, Feet	Maximum Pressure, PSI	Weight
- LOW PRESSURE FOR AIR / WATER							
-	CXREZPLP325	P	3/8"	2 1/32"	25'	300	28
CXRPLP350	CXREZPLP350	P	3/8"	2 1/32"	50'	300	43
CXRSHN350	CXREZSH350	SH	3/8"	2 1/32"	50'	300	50
CXRTSHN350	CXREZTSH350	T	3/8"	2 1/32"	50'	300	61
CXRTSHN3100	CXREZTSH3100	T	3/8"	2 1/32"	100'	300	85
CXRPLP425	-	P	1/2"	2 1/32"	25'	300	44
CXRPLP450	CXREZPLP450	P	1/2"	2 1/32"	50'	300	48
CXRSHN450	CXREZSH450	SH	1/2"	2 1/32"	50'	300	54
CXRTSHN450	CXREZTSH450	T	1/2"	2 1/32"	50'	300	63
CXRTSHN4100	CXREZTSH4100	T	1/2"	2 1/32"	100'	300	95
CXRTSHN550	-	T	3/4"	1 3/32"	50'	300	83
CXRTSHN650	-	T	1"	1 1/16"	50'	300	98
- MEDIUM PRESSURE FOR OIL APPLICATIONS							
CXRPMP325	-	P	3/8"	2 1/32"	25'	3000	49
CXRMPN350	CXREZMP350	MP	3/8"	2 1/32"	50'	3000	65
CXRTMPN350	CXREZTMP350	T	3/8"	2 1/32"	50'	3000	74
CXRTMPN3100	-	T	3/8"	2 1/32"	100'	3000	106
CXRPMP425	CXREZPMP425	P	1/2"	2 1/32"	25'	2500	49
CXRMPN450	CXREZMP450	MP	1/2"	2 1/32"	50'	2500	67
CXRTMPN450	CXREZTMP450	T	1/2"	2 1/32"	50'	2500	77
CXRTMPN4100	-	T	1/2"	2 1/32"	100'	2500	106
- HIGH PRESSURE FOR GREASE APPLICATIONS							
CXRPHP125	CXREZPHP125	P	1/4"	1 1/32"	25'	5000	48
CXRHPN150	CXREZHP150	HP	1/4"	1 1/32"	50'	5000	64
CXRTHPN150	CXREZTHP150	T	1/4"	1 1/32"	50'	5000	74
CXRTHPN1100	CXREZTHP1100	T	1/4"	1 1/32"	100'	5000	104
CXRPHP325	CXREZPHP325	P	3/8"	2 1/32"	25'	4000	49
CXRHPN350	CXREZHP350	HP	3/8"	2 1/32"	50'	4000	65
CXRTHPN350	CXREZTHP350	T	3/8"	2 1/32"	50'	4000	78



SH, MP & HP Series features dual axle support with Super Hub™



T Series features triple axle support with a full frame & Super Hub™

	80% Slower Retraction	
	Conventional SPRING DRIVEN REELS	COXREELS EZ-COIL
SPEED	25 ft./sec.	5 ft./sec.
WHIPPING	5-15 ft.	1 ft.
IMPACT	500 ft./lbs.	0-1 ft./lbs.


Based on an independent evaluation performed by COXREELS. Depending on certain conditions, results may vary.



Combo Air / Electric Spring Driven Reels

Combo reels are perfect for applications that require pneumatic air and an electrical power feed with one mounting pattern. This unit allows for half the installation time needed to install two reels at one station. The single expanded 1/4" steel base provides stability and space efficiency.

- Compact two reel assembly in one convenient mounting base
- Brass NPT swivel inlet machined from solid
- Each reel operates independently
- Choice of electrical accessory

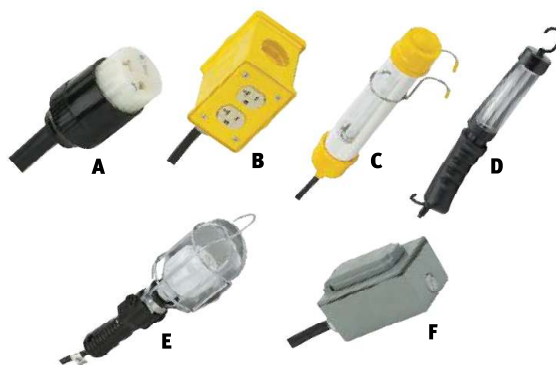

Stock No.	Electric Cord			Air Hose			Hose & Cord Length Each	Weight
	Accessory	AWG	Amps	Hose I.D.	Hose O.D.	PSI		
CXRCL350516A	Single Industrial Receptacle	16	13	3/8"	2 1/32"	300	50	94
CXRCL350512B	Quad Industrial Receptacle	12	20	3/8"	2 1/32"	300	50	97
CXRCL350516C	Fluorescent Tube Light	16	0.3	3/8"	2 1/32"	300	50	94
CXRCL350516D	Fluorescent Angle Light	16	13	3/8"	2 1/32"	300	50	94
CXRCL350516E	Incandescent Cage Light	16	13	3/8"	2 1/32"	300	50	94
CXRCL350512F	G.F.C.I. Receptacle	12	20	3/8"	2 1/32"	300	50	96

Compact Spring Retractable Power Cord Reels

Ground-breaking design sets a new bar as the ideal cord management solution capable of fulfilling any commercial or industrial application where space is limited. For indoor use.

- CoxComposite™ Hub that integrates a high strength composite with self lubricating bronze bearings
- CoxComposite™ Grommet with continuous radius design that does not pinch or catch the cord during operation.
- Choice of electrical accessory



CoxComposite™ Hub



CoxComposite™ Grommet

Stock No.	Accessory	AWG	Amps	Cord Length, Feet	Weight
CXRPC103012A	Single Industrial Receptacle	12	20	30'	17
CXRPC103012B	Quad Industrial Receptacle	12	20	30'	18
CXRPC103016C	Fluorescent Tube Light	16	0.3	30'	15
CXRPC103016D	Fluorescent Angle Light	16	13	30'	16
CXRPC103016E	Incandescent Cage Light	16	13	30'	14
CXRPC103012F	G.F.C.I. Receptacle	12	20	30'	19
CXRPC103012X	No Accessory	12	20	30'	18
CXRPC103016X	No Accessory	16	13	30'	14

Spring Retractable Power Cord Reels

PC Series spring driven "Power Cord" reels are heavy duty, industrial grade power sources.

- Includes 5' pigtail & grounding plug
- Heavy gauge powder coated steel components cover for simple slip ring routine maintenance.
- Choice of electrical accessory
- Choice of Standard or EZ-Coil® Models



Standard Stock No.	EZ-Coil® Stock No.	Accessory	AWG	Amps	Cord Length, Feet	Weight
CXRPC135012A	-	Single Industrial Receptacle	12	20	50'	40
CXRPC135012B	CXREZPC3512B	Quad Industrial Receptacle	12	20	50'	41
CXRPC135016C	CXREZPC3516C	Fluorescent Tube Light	16	0.3	50'	37
CXRPC135016D	CXREZPC3516D	Fluorescent Angle Light	16	13	50'	37
CXRPC135012F	CXREZPC5012F	G.F.C.I. Receptacle	12	20	50'	42
CXRPC135012X	CXREZPC5012X	No Accessory	12	20	50'	40
CXRPC135016X	-	No Accessory	16	13	50'	36



CXRPC135012F



CXREZPC13512A



• Read and follow all safety messages in instructions
• Read safety precautions on pages W1 to W4



CM Bandit Ratchet Lever Hoist

- Compact and portable design - Can be easily transported and used in confined areas
- Free-Chaining - allows for quick takeup and positioning of slack chain.
- 360° Rotating handle - Allows for versatile rigging options
- Optional load limiter available

Stock No.	Description	Capacity (Tons)	Lift (feet)	Lever Pull to Lift Rated Load LBF	Weight (lbs)
BAN07505	CM Bandit Ratchet Lever Hoist	3/4	5	45	13.6
BAN07510	CM Bandit Ratchet Lever Hoist		10		15.7
BAN07515	CM Bandit Ratchet Lever Hoist		15		18
BAN07520	CM Bandit Ratchet Lever Hoist		20		20.1
BAN15005	CM Bandit Ratchet Lever Hoist	1/2	5	64	20.7
BAN15010	CM Bandit Ratchet Lever Hoist		10		24.3
BAN15015	CM Bandit Ratchet Lever Hoist		15		27.9
BAN15020	CM Bandit Ratchet Lever Hoist		20		31.5



Series 602/603 Mini-Lever Hoist

- Compact design - small and lightweight allows you to take it where ever you go, fits in your toolbox
- Sturdy construction for years of use - forged upper and lower hooks, impact resistant, all steel frame, plated load chain

Stock No.	Description	Capacity (tons)	Lift (feet)	Weight (lbs)
CMS0210	CM Series 602 Mini Lever Hoist, 550 lbs 5' lift	1/4	5	6
CMS0214	CM Series 602 Mini Lever Hoist, 550 lbs 10' lift		10	7
CMS0215	CM Series 603 Mini Lever Hoist, 1100 lbs. 5' lift	1/2	5	7
CMS0216	CM Series 603 Mini Lever Hoist, 1100 lbs. 10' lift		10	8



Series 653 Manual Lever Hoist

- Sturdy construction for years of use - forged upper and lower hooks, impact resistant, all steel frame, plated load chain
- Lowest handle pull force in the industry - reduces related injuries, easy operation in confined spaces
- True one-handed free chaining - allows for fast and easy load attachment



Stock No.	Description	Capacity (tons)	Lift (feet)	Weight (lbs)
CMS5310	CM Series 653 Lever Hoist, 3/4 ton, 5' lift	3/4	5	15
CMS5311	CM Series 653 Lever Hoist, 3/4 ton, 10' lift	3/4	10	15.8
CMS5315	CM Series 653 Lever Hoist, 1 1/2 ton, 5' lift	1 1/2	5	27
CMS5316	CM Series 653 Lever Hoist, 1 1/2 ton, 10' lift	1 1/2	10	31.4
CMS5320	CM Series 653 Lever Hoist, 3 ton, 5' lift	3	5	45
CMS5321	CM Series 653 Lever Hoist, 3 ton, 10' lift	3	10	52.3

Series 640 Manual Lever Hoist

- Made in the U.S.A - Approved for use on Government Projects
- Simple construction with few parts - less downtime since it is reliable and easy to maintain
- Weatherproof construction - can be used for indoor and outdoor applications
- Optional load limiter available



Stock No.	Description	Capacity (tons)	Lift (feet)	Weight (lbs)
CMS4043	CM Series 640 Puller Lever Hoist, 3/4 ton, 5' Lift	3/4	5	16.0
CMS4060	CM Series 640 Puller Lever Hoist, 3/4 ton, 10' Lift	3/4	10	20.0
CMS4045	CM Series 640 Puller Lever Hoist, 1 1/2 ton, 5' Lift	1 1/2	5	26.0
CMS4062	CM Series 640 Puller Lever Hoist, 1 1/2 ton, 10' Lift	1 1/2	10	31.0
CMS4047	CM Series 640 Puller Lever Hoist, 3 ton, 5' Lift	3	5	38.0
CMS4065	CM Series 640 Puller Lever Hoist, 3 ton, 10' Lift	3	10	47.0



Cyclone Hand Chain Hoist

- Made in the U.S.A - Approved for use on Government Projects
- Load limiter is a standard option - overload protection for proper and safe use of hoist
- Highest efficiency in the industry - greater lift with minimum effort
- Easy to maintain - lower maintenance costs, interchangeable parts

Stock No.	Description	Capacity (tons)	Lift (feet)	Weight (lbs)
CMS4621	CM Cyclone Hand Chain Hoist, ¼ ton, 10' Lift	¼	10	40.0
CMS4732	CM Cyclone Hand Chain Hoist, ¼ ton, 20' Lift	¼	20	55.0
CMS4622	CM Cyclone Hand Chain Hoist, ½ ton, 10' Lift	½	10	40.0
CMS4733	CM Cyclone Hand Chain Hoist, ½ ton, 20' Lift	½	20	55.0
CMS4624	CM Cyclone Hand Chain Hoist, 1 ton, 10' Lift	1	10	43.0
CMS4734	CM Cyclone Hand Chain Hoist, 1 ton, 20' Lift	1	20	60.0
CMS4625	CM Cyclone Hand Chain Hoist, 1 ½ ton, 10' Lift	1 ½	10	69.0
CMS4735	CM Cyclone Hand Chain Hoist, 1 ½ ton, 20' Lift	1 ½	20	93.0
CMS4626	CM Cyclone Hand Chain Hoist, 2 ton, 10' Lift	2	10	68.0
CMS4894	CM Cyclone Hand Chain Hoist, 2 ton, 20' Lift	2	20	92.0
CMS4627	CM Cyclone Hand Chain Hoist, 3 ton, 10' Lift	3	10	103.0
CMS4736	CM Cyclone Hand Chain Hoist, 3 ton, 20' Lift	3	20	144.0
CMS4629	CM Cyclone Hand Chain Hoist, 5 ton, 10' Lift	5	10	138.0

Series 622 Hand Chain Hoist

- Simple, efficient, economical design - get the job done while staying within budget
- Compact, low headroom design - lightweight and easy to install or move, even in confined spaces

Stock No.	Description	Capacity (tons)	Lift (feet)	Weight (lbs)
CMS2208	CM Series 622 Hand Chain Hoist, ½ Ton, 15' Lift	½	15	25.0
CMS2231	CM Series 622 Hand Chain Hoist, ½ Ton, 20' Lift	½	20	30.0
CMS2210	CM Series 622 Hand Chain Hoist, 1 Ton, 15' Lift	1	15	30.0
CMS2262	CM Series 622 Hand Chain Hoist, 1 Ton, 20' Lift	1	20	38.0
CMS2213	CM Series 622 Hand Chain Hoist, 2 Ton, 15' Lift	2	15	71.0
CMS2233	CM Series 622 Hand Chain Hoist, 2 Ton, 20' Lift	2	20	80.0
CMS2259	CM Series 622 Hand Chain Hoist, 3 Ton, 10' Lift	3	15	89.0
CMS2214	CM Series 622 Hand Chain Hoist, 3 Ton, 20' Lift	3	20	109.0



• Read and follow all safety messages in instructions
 • Read safety precautions on pages W1 to W4



Lodestar Electric Chain Hoist

- Largest installed base of any hoist in the industry
- Rugged, long life design
- Grease lubrication - lifetime protection for less maintenance and improved
- Made in the U.S.A

Stock No.	Description	Capacity (tons)	Lift (feet)	Lifting Speed (ft/min)	Weight (lbs.)
CMS3555-3651	CM Lodestar 230/460V, 3ph, 60Hz, 1 ton, 10' Lift	1	10	32	117.0
CMS4255-3651	CM Lodestar 230/460V, 3ph, 60Hz, 1 ton, 20' Lift	1	20	32	128.0
CMS3565-3658	CM Lodestar 230/460V, 3ph, 60Hz, 2 ton, 10' Lift	2	10	16	137.0
CMS4265-3658	CM Lodestar 230/460V, 3ph, 60Hz, 2 ton, 20' Lift	2	20	16	157.0
CMS9508-9559	CM Lodestar 230/460V, 3ph, 60Hz, 3 ton, 10' Lift	3	10	11	162.0
CMS9510-9559	CM Lodestar 230/460V, 3ph, 60Hz, 3 ton, 20' Lift	3	20	11	190.0

Shopstar Electric Chain Hoist

- Small compact design-easy to install and move from location to location
- Grease lubrication - lifetime protection for less maintenance and improved durability
- Made in the U.S.A

Stock No.	Description	Capacity (tons)	Lift (feet)	Lifting Speed (ft/min)	Weight (lbs)
CMS2070	CM ShopStar 115V, 1ph, 60Hz, 250 lbs	1/8	10	16	26.0
CMS2090	CM ShopStar 115V, 1ph, 60Hz, 500 lbs	1/4	10	12	26.0
CMS2110	CM ShopStar 115V, 1ph, 60Hz, 1000 lbs	1/2	10	6	32.0
CMS2072	CM ShopStar 460V, 3ph, 60Hz, 250 lbs	1/8	10	16	28.0
CMS2077	CM ShopStar 460V, 3ph, 60Hz, 250 lbs	1/8	10	24	28.0
CMS2084	CM ShopStar 460V, 3ph, 60Hz, 500 lbs	1/4	10	16	28.0
CMS2100	CM ShopStar 460V, 3ph, 60Hz, 1000 lbs	1/2	10	24	28.0
CMS2121	CM ShopStar 460V, 3ph, 60Hz, 1000 lbs	1/2	10	12	32.0

Valustar Electric Chain Hoist

- Economical unit with robust design
- Grease lubrication-lifetime protection for less maintenance and improved performance
- Made in the U.S.A.

Stock No.	Description	Capacity (tons)	Lift (feet)	Lifting Speed (ft/min)	Weight (lbs)
CMS2401C	CM Valustar 115V, 1ph, 60Hz, 1/4 ton, 20' Lift	1/4	20	16	68.0
CMS2403C	CM Valustar 115V, 1ph, 60Hz, 1/2 ton, 20' Lift	1/2	20	16	68.0
CMS2407C	CM Valustar 115V, 1ph, 60Hz, 1 ton, 20' Lift	1	20	16	116.0
CMS2409C	CM Valustar 115V, 1ph, 60Hz, 2 ton, 20' Lift	2	20	8	150.0
CMS2402C	CM Valustar 230/460V, 3ph, 60Hz, 1/4 ton, 20' Lift	1/4	20	16	66.0
CMS2404C	CM Valustar 230/460V, 3ph, 60Hz, 1/2 ton, 20' Lift	1/2	20	16	66.0
CMS2408C	CM Valustar 230/460V, 3ph, 60Hz, 1 ton, 20' Lift	1	20	16	117.0
CMS2410C	CM Valustar 230/460V, 3ph, 60Hz, 2 ton, 20' Lift	2	20	8	142.0





Beam Clamps

- Used as an anchor for a hoist or rigging operation, or as a tool to position and hold beams in place when welding
- Adjustable to fit wide range of beam sizes



Stock No.	Description	Capacity (tons)	Flange Width (inches)	Weight (lbs)
CMS09001W	CM Beam Clamp, 1 ton (BC-1)	1	3 - 9	9
CMS09002W	CM Beam Clamp, 2 ton (BC-2)	2	3 - 9	13
CMS09003W	CM Beam Clamp, 3 ton (BC-3)	3	3.2 - 12.6	18
CMS09004W	CM Beam Clamp, 5 ton (BC-5)	5	3.6 - 12.2	22

Trolleys

- Shielded ball bearings - smooth rolling motion with little effort, longer life
- Wrap around side plates - protect wheels and act as stopper to prevent movement beyond desired location
- Adjustable to fit wide range of beams



CBT Push Trolley



CBT Geared Trolley

	Stock No.	Description	Capacity (tons)	Std. Beam Height (inches)	Beam Flange Width (inches)	Weight (lbs)
CBT Push Trolley	CMSCBTP0025	CMCO CBT Push Trolley, ¼ ton	¼	4 - 24	2 - 8.7	19.0
	CMSCBTP0050	CMCO CBT Push Trolley, ½ ton	½	4 - 24	2 - 8.7	19.0
	CMSCBTP0100	CMCO CBT Push Trolley, 1 ton	1	5 - 24	2.3 - 8.7	26.0
	CMSCBTP0150	CMCO CBT Push Trolley, 1 1/2 ton	1 ½	6 - 24	2.3 - 8.7	46.0
	CMSCBTP0200	CMCO CBT Push Trolley, 2 ton	2	6 - 24	2.3 - 8.7	46.0
	CMSCBTP0300	CMCO CBT Push Trolley, 3 ton	3	8 - 24	3 - 8.7	86.0
CBT Geared Trolley	CMSCBTG0100	CMCO CBT Geared Trolley, 1 ton	1	5 - 24	2.3 - 8.7	45.0
	CMSCBTG0150	CMCO CBT Geared Trolley, 1 1/2 ton	1 ½	6 - 24	2.3 - 8.7	66.0
	CMSCBTG0200	CMCO CBT Geared Trolley, 2 ton	2	6 - 24	2.3 - 8.7	69.0
	CMSCBTG0300	CMCO CBT Geared Trolley, 3 ton	3	8 - 24	3 - 8.7	111.0
	CMSCBTG0500	CMCO CBT Geared Trolley, 5 ton	5	10 - 24	3.5 - 8.7	158.0



Removable Handle Ratchet Binders

- Removable handle provides greater load security by making it less likely for load to be stolen
- Reduces overall weight
- Made in USA

Stock No.	Description	Chain Size for Grade 43	Chain Size for Grade 70	WLL (lbs)
CMS46565	Removable Handle Ratchet Binder - Body	¾"	5/16"	5400
CMS46566	Removable Handle Ratchet Binder - Body	½"	¾"	9200
CMS46565H	Removable Handle Ratchet Binder - Handle	-	-	-



CMG Ratchet Binders

- Economical unit where handle remains attached to ratchet binder; durable construction

Stock No.	Description	Chain Size for Grade 43	Chain Size for Grade 70	WLL (lbs)
CMS48365CMG	¾" Ratchet Binder	-	5/16"	6600
CMS48366CMG	½" Ratchet Binder	-	¾"	9200



- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4



Super Strong Carbon Steel Shackle

- Highest working load limit in the industry - provides extra protection and helps insure a safer lift
- Save money by having the ability to use a smaller shackle vs. the competitor
- Made in the USA

Stock No.	Description	Size Diameter (in)	WLL (tons)
CMSM646P	Super Strong Shackle, Carbon Steel, Painted, ¼"	¼	¾
CMSM647P	Super Strong Shackle, Carbon Steel, Painted, ⅝"	⅝	1
CMSM648P	Super Strong Shackle, Carbon Steel, Painted, ¾"	¾	1 ½
CMSM650P	Super Strong Shackle, Carbon Steel, Painted, ½"	½	3
CMSM651P	Super Strong Shackle, Carbon Steel, Painted, ⅝"	⅝	4 ½
CMSM652P	Super Strong Shackle, Carbon Steel, Painted, ¾"	¾	6 ½
CMSM653P	Super Strong Shackle, Carbon Steel, Painted, ⅞"	⅞	8 ½
CMSM654P	Super Strong Shackle, Carbon Steel, Painted, 1"	1	10
CMSM656P	Super Strong Shackle, Carbon Steel, Painted, 1 ¼"	1 ¼	14
CMSM657P	Super Strong Shackle, Carbon Steel, Painted, 1 ½"	1 ½	20
CMSM677P	Super Strong Shackle, Carbon Steel, Painted, 1 ¾"	1 ¾	30
CMSM658P	Super Strong Shackle, Carbon Steel, Painted, 2"	2	35



Herc-Alloy 1000 Chain Slings

- Utilizes Herc-Alloy® 1000 Chain which has the strongest weight-to-strength ratio
- Easy to inspect and repair

Stock No.	Description	Chain Size (in)	Reach (ft)	WLL at 90° (lbs)	WLL at 60° (lbs)	WLL at 45° (lbs)	WLL at 30° (lbs)
CMS39SOSR5	Single Chain Sling - Master Link and Sling Hook, 5'	¾	5	8800	-	-	-
CMS28SAALR10	Single Adjustable Chain Sling, 10'	¾	10	4300	-	-	-
CMS39SAALR10	Single Adjustable Chain Sling, 10'	¾	10	8800	-	-	-
CMS51SAALR10	Single Adjustable Chain Sling, 10'	½	10	15000	-	-	-
CMS28DOSR5	Double Chain Sling - Master Link and Sling Hook, 5'	¾	5	-	7400	6100	4300
CMS39DOSR5	Double Chain Sling - Master Link and Sling Hook, 5'	¾	5	-	15200	12400	8800
CMS51DOSR5	Double Chain Sling - Master Link and Sling Hook, 5'	½	5	-	26000	21200	15000
CMS28DAALR10	Double Adjustable Chain Sling, 10'	¾	10	-	7400	6100	4300
CMS39DAALR10	Double Adjustable Chain Sling, 10'	¾	10	-	15200	12400	8800
CMS51DAALR10	Double Adjustable Chain Sling, 10'	½	10	-	26000	21200	15000



Grade 30 Proof Coil Chain

- Manufactured to meet ASTM & NACM specifications
- Typically used as barrier chain, trailer safety chains, light construction, and the marine industry
- Not for overhead lifting

Stock No.	Description	Size (in)	WLL (lbs)	Feet per Pail	Weight per 100' (lbs)
CMS671410	Grade 30 Zinc Plated Pails, ⅜"	⅜	800	250	37
CMS671411	Grade 30 Zinc Plated Pails, ¼"	¼	1300	140	60
CMS671412	Grade 30 Zinc Plated Pails, ⅝"	⅝	1900	90	81
CMS671413	Grade 30 Zinc Plated Pails, ¾"	¾	2650	60	133
CMS671015	Grade 30 Zinc Plated Pails, ½"	½	4500	90	278



Grade 70 Binder Chain Assemblies

- Meets all Department of Transportation requirement
- No ultra-violet degrading like with synthetic straps

Stock No.	Description	Size (in)	WLL (lbs)	Weight Each (lbs)
CMS638277	¾" x 16' Grade 70 with Clevis Hooks - In Bag	¾	4700	17.1
CMS638266	¾" x 20' Grade 70 with Clevis Hooks - In Bag	¾	4700	22.1
CMS638268	¾" x 16' Grade 70 with Clevis Hooks - In Bag	¾	6600	26.6
CMS638267	¾" x 20' Grade 70 with Clevis Hooks - In Bag	¾	6600	32.9

Service Jacks

HW93667

- Handle adjusts to three pumping positions
- Extra long chassis for hard to reach points
- T handle with release knob for positioning and load control
- Sealed hydraulic unit keeps out grit, grime and moisture
- Cast lift arm for heavy loads
- Operates manually or with air
- Patented "Speed Pak™" reduces handle pumping
- 140PSI required for maximum load



HW93667

Stock No.	Description	Capacity	Lifting Range
HW93667	Air/Manual Long Chassis Service Jack	4 Ton	5" - 25-3/4"

10 Ton Wheel Lift System

- Lifts engage wheels
- No need to remove panels on vehicle
- Raise front or rear of vehicle using a single controller
- Load retention pin allows lifts to function as stands
- Wide base ensures stability
- Completely air operated, no electrical connections
- Safety latch provides six different locked positions
- Portable, use in any area of the shop



HW93693

Stock No.	Capacity per Pair	Max. Height	Power Raise	Min. Wheel Dia.	Max. Wheel Dia.
HW93693	10 Ton	24"	24"	19-1/2"	24-1/2"

Note: Sold and to be used in pairs

Truck Air Jacks

HW93735A

- 8" Low height for lifting from axle or suspension
- Compact, powerful design for quicklifts
- Pressure relief valve prevents overloading
- Coated ram prevents rust, extends jack life
- Air assisted ram retract
- 3 position handle
- 2 year warranty



HW93735A

HW93737A

- Removable handle and 10 foot air hose for safe position and operation
- 10 ton capacity when used separately, 20 tons when used in pairs
- Lifting Range 17-1/2" to 51-1/2"
- Completely air-operated
- Doubles as a support stand



HW93737A

Stock No.	Description	Capacity	Power Raise	Min. Ht.	Max. Ht.	Required Operating Pressure
HW93737A	Trolley Air Jack	10 Ton	11-1/2"	17-3/4"	51-1/2"	150 - 200 PSI
HW93735A	Wheeled Truck Jack	25 Ton	5-1/8"	8"	18"	110 - 200 PSI

Note: Sold and to be used in pairs

Jack Stands

HW93511 / HW93512

- Pin style column adjustment
- Heavy duty square tubing
- Large saddle securely supports load
- Attached wheels for easy movement
- (HW93511 Only)
- Ideal for fleet, agricultural and construction maintenance
- Sold in pairs



HW93512



HW93511

HW93526A

- Pin style column adjustment
- Heavy duty square tubing
- Large saddle securely supports load
- Ideal for fleet, agricultural, and construction maintenance
- Sold and to be used in pairs



HW93526A

Stock No.	Description	Capacity per Pair	Base Size	Min. Height	Max. Height	Height Intervals
HW93511	Heavy Duty Jack Stands	10 Ton	18 x 18"	30"	52"	2"
HW93512	High Reach Jack Stands	10 Ton	16 x 16"	19-1/2"	31-1/2"	2"
HW93526A	Forklift Jack Stands	25 Ton	10 x 10"	12-1/4"	20"	1-1/2"



• Read and follow all safety messages in instructions
• Read safety precautions on pages W1 to W4



OMG60253

Shop Press With Hand Pump

- Ideal for removal or installation of gears, u-joints, pulleys, wrist pins & other shop jobs
- Excellent for bending, bonding or straightening applications
- Multi position bed for work at various heights
- Heavy steel welded frame for strength and stability

Stock No.	Description
OMG60253	25 Ton Capacity



OMG31250
1250 Lbs. capacity
with rotating head

Engine Stand

- Constructed from heavy-gauge welded square tubular steel
- Extra-long handle with rubber grip for easy rotation and maneuvering
- Head plate locks in 8 positions and rotates 360°
- Only OMG31256 come with worm gears

Stock No.	Description	Rotation
OMG30750	750 Lbs. Capacity	Manual
OMG31250	1250 Lbs. Capacity	Manual
OMG31256	1250 Lbs. Capacity	Gear Drive



OMG44010

Engine Cranes

- Heavy duty welded construction with rugged reinforced tubular steel
- Metered control release valve for lowering boom at a precisely-controlled rate of speed
- Special 8 ton hydraulic long rams are equipped with a patented built-in by-pass mechanism

Stock No.	Description
OMG44020	2 Ton Capacity



OMG22903

Treadle Foot Pump

- Efficiently operates any single-acting rams up to 55 ton capacity
- Provides up to 10K PSI with standard shop air (110-175 PSI)
- Built-in pressure by-pass protects against overload operation
- Constructed of light weight corrosion-free aluminum
- Uses 3/8" NPT fluid coupler
- Stock No. OMG22903



OMG18124C

Air Bottle Jacks

- Air motor operation for fast, easy lifts
- Uses standard shop air (110-175 PSI)
- Quick connector air Hose for easy hook up and disconnection
- Sturdy steel construction with extra forged base for added stability

Stock No.	Description	Lifting Range
OMG18124C	12 Ton Capacity	9-½" - 18-½"
OMG18204C	20 Ton Capacity	9-¾" - 18-¾"
OMG18302C	30 Ton Capacity	11" - 18-½"
OMG18502	50 Ton Capacity	12" - 19"



OMG29023B

Low Profile Service Jack

- Extra long low side frames designed for long reach under the car chassis
- No load first pump lifting point up to 13"
- Innovative design of Magic Lift™ offers a quicker life for professional performance
- Low profile design for maximum access, which fits easily and safely under vehicle
- Wide stance and low center of gravity provides optimum stability under load stress

Stock No.	Description	Lifting Range
OMG29023B	2 Ton Capacity	2-½" - 20"



OMG32107B

Pin Style Jack Stands

- Jack Stands use pin to hold bar safely in place when supporting load
- Easy height adjustment
- Sturdy welded steel construction for superior safety and strength
- Heavy gauge steel frame helps prevent distortion or twisting
- Sold and to be used only in pairs

Stock No.	Description
OMG32107B	10 Ton Capacity - high lift, adjusts from 28" - 47"
OMG32225B	22 Ton Capacity - truck jack stands, adjusts from 12-½" - 19-¾"

Note: Sold and to be used in pairs



OMG93201

- Specifically designed for heavy-duty tasks
- Steel wheels design for extra durability
- Long T-handle increases mobile efficiency
- Sold and to be used only in pairs
- Wider width for stability

Stock No.	Dimensions	Handle Length	Maximum Vehicle Tire Width
OMG93201	45-5/8" x 18-¼" x 9-¼"	33-½"	15-½"

Note: Sold and to be used in pairs



• Read and follow all safety messages in instructions
 • Read safety precautions on pages W1 to W4



WMH414461

Bandsaw Blade: Please order Easy Cut® Part Number: 3857-13-0.6-EZ-M 5' 8-1/2"

**WMH414461, WMH414453* -
5" X 8" Horizontal Bandsaws**

A steel heat-treated worm driving a bronze worm gear gives smooth and quiet operations of the gear box assembly. The JET oil bath drive train extends the production life of the machine parts. The blade guides adjust fully in three planes. The saw's sliding guide arm permits positioning close to the cut.

- Adjustable hydraulic feed system
- Adjustable ball bearing guides
- Heat treated steel worm gear and bronze drive gear
- Automatic shut off at end of cut
- Handle & Wheels for convenient moving to various work stations
- 115V 1PH, 1/2HP

*Includes 1 gallon capacity coolant system, 115V/1Ph, complete with hose, flexible nozzle, shut-off valve, tank and baffle



WMH414454

Bandsaw Blade: Please order Easy Cut® Part Number: 3857-20-0.9-EZ-M 7' 9"

**WMH414454 - 7" x 12" Horizontal Wet
Band Saw**

- Blade Guides:
Side: Eccentric shaft, ball bearing
Rear: Ball bearings
- Blade drive is steel, heat treated worm, driving a bronze worm gear in oil bath
- Heavy duty cast iron saw head and table
- Oil bath hardened and ground worm gear
- Adjustable ball bearing blade guides
- Blade wheels are made of flanged cast iron
- Adjustable hydraulic feed system
- Automatic shut-off at end of cut
- 115V 1PH, 3/4HP

*Wet cutting saw includes 1 gallon capacity coolant system, 115V/1Ph, complete with hose, flexible nozzle, shut-off valve, tank and baffle



WMH414500K

Bandsaw Blade: Please order Easy Cut® Part Number: 3857-13-0.6-EZ-M 7' 8-1/2"

**WMH414500K - 14" Wood/Metal
Vertical Bandsaws**

These saws are specially designed to effectively cut a variety of materials including wood, plastic, bakelite, composites, ferrous and non-ferrous metals. Capable of contour and straight cutting and resawing. Can cut delicate curves in both thick and thin stock.

- Cast iron frame
- Solid, one-piece steel base for extra stability
- Conveniently located on/off switch
- Exclusive gear box design allows wood/metal model saws to be used for a wider variety of metal, wood, non-ferrous metal and plastic cutting applications.
- Voltage 1HP, 115V, 1PH

WMH577003


WMH577003 - 1" x 42" Belt/8" Sander with Miter Gauge

- Hinged idler wheel cover
- Power take off, allows for mounting an optional flex shaft, when can be used to do carving, drum sanding, deburring and dozens of other jobs
- Deluxe miter gauge that turns and locks for common angles 45° both left and right
- Abrasive belt unit does the work of a jig saw, coping saw or hand file while removing material and finishing at the same time, allows the operator to get into small openings, plus handle odd shapes and angles
- Allows for sanding, grinding or finishing of outside, curves or odd shaped work pieces on the belt
- Grind, sand or finish large work pieces on the disc unit fast and efficiently; combined with the tilting table, the operator has the advantage of chamfering or beveling, table is slotted to accept miter gauge
- Delivers sharper, faster cutting actions; easy belt changes with a variety of grits, belt keeps the machine cool, so one can complete a wide range of jobs
- When using non-woven synthetic belts the operator can blend, polish, buff or finish metal surfaces in addition to defuzzing wood surfaces
- 1/3HP, 1PH, 115V Motor and Toggle Switch

WMH414550K


WMH414550K Combination Belt and Disc Machine

- 6" x 48" Belt
- 10" Disc
- Two cast iron tilting tables for mitering applications
- Full access to the belt when tilted in the horizontal position
- Dust collection shrouds on belt and disc
- Quick-release tension mechanism makes belt changes quick and easy
- Removable safety key switch
- Enclosed base protects motor from sanding dust
- Floor stand included (some assembly required)


WMH577101

WMH577101 JET Industrial Bench Grinders

- UL listed
- Totally enclosed, pre-lubricated ball bearings
- Heavy-duty guarded toggle switch on 8" and 10"
- Rubber mounts prevent movement

Stock No.	Wheel Diameter (dia. x W/in.)
WMH577101	6" Bench Grinder x 3/4" Wide Wheels, 1/2HP, 115V, 1PH
WMH577102	8" Bench Grinder, 1" Wide Wheels, 1HP, 115V, 1PH
WMH577103	10" Bench Grinder, 1" Wide Wheels, 1 1/2HP, 115V, 1PH


WMH577172

WMH577172 Pedestal Stand for Bench Grinders

- Heavy-duty cast iron construction
- Stable, wide stance base
- Fully adjustable platform coolant tank and tool tray

WMH354170


WMH354170 JET 20" Floor Drill Press

- Hinged metal belt and pulley cover coupled with quick adjustment motor mount allow rapid changing of spindle speeds
- Rotating, 45° tilting, crank-operated worktable with quick release clamp
- On/off switch located on front of the drill press head
- A 1/2" diameter external positive depth stop with three nut locking feature for quick adjustment
- Adjustable tension spindle return spring
- Spindle is supported by high quality ball bearings
- Built-in work lamp on all models, bulb not included.
- Drill chuck and key included
- 1" Drilling Capacity, 1-1/2 HP, 1PH, 115/230V



• Read and follow all safety messages in instructions
 • Read safety precautions on pages W1 to W4

WILTON/JET



JET 6,000 Lb. Capacity Premium Pallet Trucks

- Premium quality 6,000 lbs. capacity pallet truck with robotic welds
- Easy-to-use with large ergonomic handle, fingertip controls and 200 degrees turning radius
- Handle returns to upright position when not in use
- Articulating axle maintains wheel contact on uneven floor surfaces
- Hydraulic pump is load tested and inspected 20 times prior to assembly
- One-piece cast pump features hardened and chromed piston and ram with high quality seals
- Pump also features step-less lowering valve, allowing you to control the rate of descent, top-of-stroke and safety overload bypass system
- Single point replacement valve makes servicing or rebuilding easy
- Solid steel lifting rods, no periodic adjustment required
- Rounded fork tips with nylon rollers for trouble-free pallet entry and exit
- Polyurethane over aluminum steer wheels with lifetime lubricated bearings
- Nylon load wheels with lifetime lubricated bearings



WMH140175

Stock No.	Item Description
WMH140170	20" x 36" Forks 6,000 lb Capacity
WMH140172	20" x 48" Forks 6,000 lb Capacity
WMH140174	27" x 42" Forks 6,000 lb Capacity
WMH140175	27" x 48" Forks 6,000 lb Capacity

JET 5,000 Lb. Capacity J Series Pallet Trucks

- High quality 5,000 lbs. capacity pallet truck with durable powder coat finish
- 2-1/2" lowered height for smaller opening pallets
- Easy-to-use with one hand operation, fingertip controls and 180 degrees turning radius
- Handle returns to upright position when not in use
- Articulating axle maintains wheel contact on uneven floor surfaces
- Welded steel pump features hardened and chromed piston and ram with high quality seals
- Pump also features top-of-stroke and safety overload bypass system
- Solid steel lifting rods, no periodic adjustment required
- Tapered fork tips with steel ramps for trouble-free pallet entry and exit
- Polyurethane over steel steer wheels with lifetime lubricated bearings
- Nylon load wheels with lifetime lubricated bearings
- Additional grease fittings provide for lubrication of pivot points



WMH151009

	Stock No.	Item Description
JET PALLET TRUCKS	WMH151003	16" x 36" Forks, 5,000 Lb Capacity
	WMH151005	20" x 42" Forks, 5,000 Lb Capacity
	WMH151006	20" x 48" Forks, 5,000 Lb Capacity
	WMH151008	27" x 42" Forks, 5,000 Lb Capacity
	WMH151009	27" x 48" Forks, 5,000 Lb Capacity

JET HD Resin Service Carts

- Heavy duty resin construction resists dents, chips, and rust
- Handle has built in storage bins
- Round corners mean no sharp edges to nick walls or furniture
- Large, quiet, non-marking 5" casters



WMH140019

Stock No.	Model No.	Max Capacity (lbs.)	Shelf Size (in)	Upper Shelf Height (in)	Height Between Shelves (in)	Lower Shelf Height (in)	Caster Size (lbs)	Overall Size (LxWxH/in)	Shipping Weight	Carton Pack
WMH140018	PUC-3117	550	31 1/4 x 17 1/4	33 1/2	19 1/2	6	5 x 1	39 3/4 x 17 1/4 x 33 1/2	40	1
WMH140019	PUC-3725	550	37 3/4 x 25 3/4	33 1/2	19 1/2	6	5 x 1	46 x 25 3/4 x 33 1/2	42	1



SOLVING THE CRITICAL.

MODULAR HIGH DENSITY TOOL STORAGE



Build-A-Bay

A complete selection of base cabinets for complete design flexibility. Choose from single, double and triple bank configurations. All base units come standard with bottom skids for forklift access and 4" flat black kick plates. Best of all, everything, from top to bottom, is Snap-on.



Double Bank KRS1032D
 Width: 72.87"
 Height: 40.00"
 Depth: 29.09"
 Case height: 37.31"



Single Bank KRS1501C
 Width: 35.68"
 Height: 54.60"
 Depth: 29.09"
 Case height: 50.67"



Double Bank KRS1502A
 Width: 54.28"
 Height: 54.60"
 Depth: 29.09"
 Case height: 50.67"



Single Bank KRS756C
 Width: 35.68"
 Height: 36.82"
 Depth: 24.09"
 Case height: 32.89"



Double Bank KRS7022C
 Width: 54.28"
 Height: 36.82"
 Depth: 29.09"
 Case height: 32.89"



Triple Bank KRS1023C3
 Width: 72.87"
 Height: 40.00"
 Depth: 29.09"
 Case height: 37.31"



Double Bank KRS1022C
 Width: 54.28"
 Height: 40.00"
 Depth: 29.09"
 Case height: 37.31"



Single Bank KRS1521C
 Width: 54.28"
 Height: 54.60"
 Depth: 29.09"
 Case height: 50.67"



Triple Bank KRS7023C
 Width: 72.87"
 Height: 36.82"
 Depth: 29.09"
 Case height: 32.89"




Single Bank KRS1056C
 Width: 35.68"
 Height: 40.00"
 Depth: 29.09"
 Case height: 37.31"



Double Bank KRS722C
 Width: 54.28"
 Height: 36.82"
 Depth: 24.09"
 Case height: 32.89"

Colors Available





MODULAR HIGH DENSITY TOOL STORAGE

Build-A-Bay

Have a special need? Snap-on has the answer. For example, our innovative Docker Locker™ allows technicians to bring their tools to the job and secure them overnight. Our under-bench cart port provides safe, easy overnight tool storage for your technicians.



24" Wall Mounted Overhead KRS2416A
(not shown)
Width: 24.00"
Height: 19.70"
Depth: 18.00"



18" Bulk Storage KRS1815B (not shown)
Width: 18.00"
Height: 36.82"
Depth: 24.00"
Case height: 32.89"

24" Computer Cabinet KRS2413B
Left Hand Door
Width: 24.00"
Height: 36.82"
Depth: 24.00"
Case height: 32.89"



36" Wall Mounted Overhead KRS3616A
(not shown)
Width: 36.00"

48" Wall Mounted Overhead KRS4816A
(above left)
Width: 48.00"

Docker Locker for KRS 1500 Series KRS1518
(not shown)
Width: 24.00"
Height: 54.60"
Depth: 29.09"
Case height: 50.67"

All docker lockers include tool cart KR7088A

24" Bulk Storage KRS2415B (above)
Width: 24.00"

48" Bulk Storage w/2 Doors KRS4815B (not shown)
Width: 48.00"

72" Bulk Storage w/4 Doors KRS7215C (below)
Width: 73.50"



Under Bench Cart Port KRS2417B (left)
Width: 24.00"
Height: 36.82"
Depth: 29.09"
Case height: 32.89"
(Shown with KRS 2415 Bulk Storage, can also be used with 700 and 7000 series tool storage units).



FLUOROPOLYMER MAINTENANCE



• Read and follow all safety messages in instructions
• Read safety precautions on pages W1 to W4

SHOP ORGANIZATION



Available in 3 colors



Open Starter

Open Add-On

V-Grip Shelving

- Shelves Adjust on 1.5" Centers - No Tools Required
- Common Uprights for Continuous Row Applications
- Closed Units Feature Reflective White Side/Back Panels
- Customize with Wire Shelves and Modular Drawers

84" Open Preconfigured Units

Depth	Width	Capacity Per Shelf	Color	Five Shelves Starter Stock No.	Add-On Stock No.	Seven Shelves Starter Stock No.	Add-On Stock No.	Extra Shelf
18"	36"	700 lbs.	Red	EQ663-5SR	EQ663-5AR	EQ663-7SR	EQ663-7AR	EQ6231R
18"	36"	700 lbs.	Gray	EQ663-5SG	EQ663-5AG	EQ663-7SG	EQ663-7AG	EQ6231G
18"	36"	700 lbs.	Blue	EQ663-5SB	EQ663-5AB	EQ663-7SB	EQ663-7AB	EQ6231B
24"	36"	721 lbs.	Red	EQ665-5SR	EQ665-5AR	EQ665-7SR	EQ665-7AR	EQ6232R
24"	36"	721 lbs.	Gray	EQ665-5SG	EQ665-5AG	EQ665-7SG	EQ665-7AG	EQ6232G
24"	36"	721 lbs.	Blue	EQ665-5SB	EQ665-5AB	EQ665-7SB	EQ665-7AB	EQ6232B

84"H Closed preconfigured unites with drawers



Closed Starter

Closed Add-On

84" Closed Preconfigured Units

Depth	Width	Capacity Per Shelf	Color	Five Shelves Starter Stock No.	Add-On Stock No.	Seven Shelves Starter Stock No.	Add-On Stock No.	Extra Shelf
18"	36"	700 lbs.	Red	EQ673-5SR	EQ673-5AR	EQ673-7SR	EQ673-7AR	EQ6231R
18"	36"	700 lbs.	Gray	EQ673-5SG	EQ673-5AG	EQ673-7SG	EQ673-7AG	EQ6231G
18"	36"	700 lbs.	Blue	EQ673-5SB	EQ673-5AB	EQ673-7SB	EQ673-7AB	EQ6231B
24"	36"	721 lbs.	Red	EQ675-5SR	EQ675-5AR	EQ675-7SR	EQ675-7AR	EQ6232R
24"	36"	721 lbs.	Gray	EQ675-5SG	EQ675-5AG	EQ675-7SG	EQ675-7AG	EQ6232G
24"	36"	721 lbs.	Blue	EQ675-5SB	EQ675-5AB	EQ675-7SB	EQ675-7AB	EQ6232B

84"H Closed preconfigured unites with drawers:
Shown with optional wire shelf top.

84" Closed Preconfigured Units With Drawers

- Shown with optional wire shelf top
- Includes (2) 4-1/2" High and (2) 6" High Drawers
- 48 Standard drawer sizes
- 36" and 48" widths
- 18" and 24" depths
- Drawer heights from 3" to 13 1/2"
- 200 and 400lb. Drawer capacity
- Each drawer has individual rigid mounting brackets for 100% flexibility of drawer location
- Drawers available with or without divider sets
- Drawers include handles with integral plastic-covered label holder



Starter

Add-on

Drawer Depth	Drawer Width	Capacity per Drawer	Color	Starter Stock Number	Add-On Unit Stock Number
18"	36"	200 lbs.	Gray	EQ4221VNS	EQ4221VNA
18"	36"	400 lbs.	Gray	EQ4221VHS	EQ4221VHA
18"	48"	400 lbs.	Gray	EQ4241VHS	EQ4241VHA
24"	36"	200 lbs.	Gray	EQ4231VNS	EQ4231VNA
24"	36"	400 lbs.	Gray	EQ4231VHS	EQ4231VHA
24"	48"	400 lbs.	Gray	EQ4251VHS	EQ4251VHA

Preconfigured Modular Drawer Cabinet Workcenters

- 30" wide drawer cabinets
- "Quiet Ride™" drawers with 400 lb. capacity per drawer
- Choice of vivid colors to enhance work environment
- Knockouts in legs provide for safe, convenient electrical hookup
- Lower recessed shelf for convenience
- All benches are 30" deep
- Equipto offers over 140 sizes and styles of modular workcenters

Stock No.	Bench Height	Top	Bench Length	Color	Number of Drawers
EQ2576-5WR	34"	Hardwood	5'	Red	6
EQ2576-5WG	34"	Hardwood	5'	Gray	6
EQ2576-5WB	34"	Hardwood	5'	Blue	6
EQ2576-6WR	34"	Hardwood	6'	Red	6
EQ2576-6WG	34"	Hardwood	6'	Gray	6
EQ2576-6WB	34"	Hardwood	6'	Blue	6
EQ2576-8WR	34"	Hardwood	8'	Red	6
EQ2576-8WG	34"	Hardwood	8'	Gray	6
EQ2576-8WB	34"	Hardwood	8'	Blue	6
EQ2596-8WR	34"	Hardwood	8'	Red	12
EQ2596-8WG	34"	Hardwood	8'	Gray	12
EQ2596-8WB	34"	Hardwood	8'	Blue	12

Preconfigured Closed Leg Workcenters

Equipto closed leg benches combine high-efficiency bench features with the important benefits of cabinet space. Choose from more than 200 sizes and styles and a range of features to match your exact needs. Rugged structural unit designed for tough use with the flexibility for adding accessories.

- Sliding doors and 1 shelf included
- Steel top with backsplash
- All benches are 30" deep

Stock No.	Bench Height	Bench Length	Color
EQ275U4R	34"	4'	Red
EQ275U4G	34"	4'	Gray
EQ275U4B	34"	4'	Blue
EQ275U5R	34"	5'	Red
EQ275U5G	34"	5'	Gray
EQ275U5B	34"	5'	Blue
EQ275U6R	34"	6'	Red
EQ275U6G	34"	6'	Gray
EQ275U6B	34"	6'	Blue
EQ275U8R	34"	8'	Red
EQ275U8G	34"	8'	Gray
EQ275U8B	34"	8'	Blue

Preconfigured Pedestal Workcenters

Equipto Pedestal Benches offer the perfect bench/cabinet combination and feature strong, rugged work surfaces, lower shelf space and lockable cabinets and drawers. Customize with accessories and over 180 combinations of height, length, depth, and top surfaces.

- Lower recessed shelf
- Door cabinets have middle shelf
- All benches are 30" deep
- All Cabinets are 34"H x 15"W

Stock No.	Bench Height	Bench Length	Color
EQ255U4R	34"	4'	Red
EQ255U4G	34"	4'	Gray
EQ255U4B	34"	4'	Blue
EQ255U5R	34"	5'	Red
EQ255U5G	34"	5'	Gray
EQ255U5B	34"	5'	Blue
EQ255U6R	34"	6'	Red
EQ255U6G	34"	6'	Gray
EQ255U6B	34"	6'	Blue
EQ255U8R	34"	8'	Red
EQ255U8G	34"	8'	Gray
EQ255U8B	34"	8'	Blue

All Workcenters are Available in 3 colors



Optimize work areas by combining work and storage space into a modular drawer cabinet workcenter. With capacity up to 400 lbs per drawer, and single or double cabinet configurations, these workcenters are designed to last a lifetime.



EQ2576



EQ2596



EQ275



EQ255



• Read and follow all safety messages in instructions
 • Read safety precautions on pages W1 to W4

SHOP ORGANIZATION



2303DT shown with optional fluid container, drawer kit and shelf.



2307DT
Fluid Container Kit



221DT -
Drawer Kit



2203 -
Caster Kit

Teardown Benches

- Ideal for working on transmissions, small engines and hydraulic components
- Reinforced work surface will stand up to years of heavy use
- Top has a 3/4" high retaining lip on all sides tapering to the rear center to a 1/2" threaded and plumbed drain
- Optional caster kit consists of 4 swivel 7 1/2"H casters
- 1/2" threaded drain nipple allows for connection of hose for fluid capture

Stock No.	Description	Depth	Length	Leg Height
EQ2301DT	Steel Top	30"	48"	29"
EQ2303DT	Steel Top	30"	48"	34"
EQ2311DT	Steel Top	30"	60"	29"
EQ2313DT	Steel Top	30"	60"	34"
EQ2301DTSS	Stainless Steel Top	30"	48"	29"
EQ2303DTSS	Stainless Steel Top	30"	48"	34"
EQ2311DTSS	Stainless Steel Top	30"	60"	29"
EQ2313DTSS	Stainless Steel Top	30"	60"	34"

Open Leg Workcenters

- A simple, easy way to achieve efficient work space with economy and durability
- Designed to boost productivity over years of demanding service

Stock No. with Steel Top Backstop	Stock No. Without Steel Top Backstop	Dimensions D x H x L (Inches)
EQG2223U4	EQG2223D4	30 X 34 X 48
EQG2223U5	EQG2223D5	30 X 34 X 60
EQG2223U6	EQG2223D6	30 X 34 X 72
EQG2223U8	EQG2223D8	30 X 34 X 96



Pedestal Workcenters with 1 Closed Leg & 1 Drawer Pedestal

- A perfect bench / cabinet combination
- Strong, rugged work surfaces with lower shelf space and lockable cabinets
- Door cabinets include middle shelf



Stock No. with Steel Top Backstop	Dimensions D x H x L (Inches)
EQ245U4	30 X 34 X 48
EQ245U5	30 X 34 X 60
EQ245U6	30 X 34 X 72
EQ245U8	30 X 34 X 96

Flammable Liquid Storage Cabinets

- Galvanized steel shelves and leveling legs
- Support up to 350 lbs
- Internal and external welded construction
- 18 guage steel reinforced double wall panel construction
- 2" raised leakproof sill
- 2" vent with fire baffle and cap
- Ground connection
- Lead-free high gloss baked on powder finish
- 3 point key lock doors
- Meet OSHA and NFPA code 30 specifications
- Self-closing models meet UFC79



Stock No.	Door Type	Capacity (Gallons)	Number of Shelves	Dimensions W x D x H (Inches)
EQFSC30M	Manual Close	30	1	43 x 18 x 44
EQFSC30S	Self-Closing	30	1	43 x 18 x 44
EQFSC45M	Manual Close	45	2	43 x 18 x 65
EQFSC45S	Self-Closing	45	2	43 x 18 x 65
EQFSC60M	Manual Close	60	2	31 x 31 x 65
EQFSC60S	Self-Closing	60	2	31 x 31 x 65
EQFSC90M	Manual Close	90	2	43 x 34 x 65
EQFSC90S	Self-Closing	90	2	43 x 34 x 65
EQFSC31XS	Extra Shelf for 31" wide units	-	-	31 x 31
EQFSC45XS	Extra Shelf for 43" wide units	-	-	43 x 18

Quick-View Storage Cabinets

- UV, break and scratch resistant plastic Lexan panels are mounted in both door frames for an unobstructed view of the cabinet's contents
- Each shelf has a 225 lb. weight capacity with 2" increment height adjustability
- Cabinet doors have a 3-point locking mechanism with one chrome plated handle
- Multiple cabinets can be keyed alike or individually
- Dollies are available for the 78" high cabinets to add mobility



Stock No.	Description	Color	Width	Depth	Height
EQQVC301226R	Wall Hung Quick-View Cabinet	Red	30"	12"	26"
EQQVC301226G	Wall Hung Quick-View Cabinet	Gray	30"	12"	26"
EQQVC301226B	Wall Hung Quick-View Cabinet	Blue	30"	12"	26"
EQQVC361842R	Quick-View Storage Cabinet	Red	36"	18"	42"
EQQVC361842G	Quick-View Storage Cabinet	Gray	36"	18"	42"
EQQVC361842B	Quick-View Storage Cabinet	Blue	36"	18"	42"
EQQVC361878R	Quick-View Storage Cabinet	Red	36"	18"	78"
EQQVC361878G	Quick-View Storage Cabinet	Gray	36"	18"	78"
EQQVC361878B	Quick-View Storage Cabinet	Blue	36"	18"	78"
EQQVC362478R	Quick-View Storage Cabinet	Red	36"	24"	78"
EQQVC362478G	Quick-View Storage Cabinet	Gray	36"	24"	78"
EQQVC362478B	Quick-View Storage Cabinet	Blue	36"	24"	78"
EQQVC482478R	Quick-View Storage Cabinet	Red	48"	24"	78"
EQQVC482478G	Quick-View Storage Cabinet	Gray	48"	24"	78"
EQQVC482478B	Quick-View Storage Cabinet	Blue	48"	24"	78"



Dolly

Dollies for Quick-View Storage Cabinets

Fits Cabinet Size	Red	Gray	Blue
36" x 18"	EQCD1836R	EQCD1836G	EQCD1836B
36" x 24"	EQCD1836R	EQCD1836G	EQCD1836B
48" x 24"	EQCD2448R	EQCD2448G	EQCD2448B

Standard Storage Cabinets

Stock No.	Description	Color	Width	Depth	Height
EQ1714R	Combination Cabinet	Red	36"	18"	78"
EQ1714G	Combination Cabinet	Gray	36"	18"	78"
EQ1714B	Combination Cabinet	Blue	36"	18"	78"
EQ1719R	Combination Cabinet	Red	36"	24"	78"
EQ1719G	Combination Cabinet	Gray	36"	24"	78"
EQ1719B	Combination Cabinet	Blue	36"	24"	78"
EQ1710R	5-Shelf Cabinet	Red	36"	18"	78"
EQ1710G	5-Shelf Cabinet	Gray	36"	18"	78"
EQ1710B	5-Shelf Cabinet	Blue	36"	18"	78"
EQ1715R	5-Shelf Cabinet	Red	36"	24"	78"
EQ1715G	5-Shelf Cabinet	Gray	36"	24"	78"
EQ1715B	5-Shelf Cabinet	Blue	36"	24"	78"
EQ1734R	2-Shelf Cabinet	Red	30"	13"	27"
EQ1734G	2-Shelf Cabinet	Gray	30"	13"	27"
EQ1734B	2-Shelf Cabinet	Blue	30"	13"	27"
EQ1735R	2-Shelf Cabinet	Red	36"	13"	27"
EQ1735G	2-Shelf Cabinet	Gray	36"	13"	27"
EQ1735B	2-Shelf Cabinet	Blue	36"	13"	27"



Combination Cabinet



5-Shelf Cabinet



2-Shelf Cabinet

Equipto® V-Grip Tire Racks


- Flexible and economical tire storage - adjustable for all sizes of passenger car tires and rims
- Racks assemble quickly and adjust with a minimum number of tools
- Beams adjust up or down on 1- 1/2" centers
- Brackets furnished for use back-to-back or against the wall



Stock No.	Description	Dimensions
EQ806-52MOB	2 Tier Mobile Tire Rack with Casters	18"D x 60"W x 67"H
EQ80652S	3 Tier Stationary Tire Rack Starter Section (2 ends)	15"D x 60"W x 84"H
EQ80652A	3 Tier Stationary Tire Rack Add-on Section (1 end)	15"D x 60"W x 84"H
EQ80632S	4 Tier Stationary Tire Rack Starter Section (2 ends)	15"D x 60"W x 120"H
EQ80632A	4 Tier Stationary Tire Rack Add-on Section (1 end)	15"D x 60"W x 120"H



- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

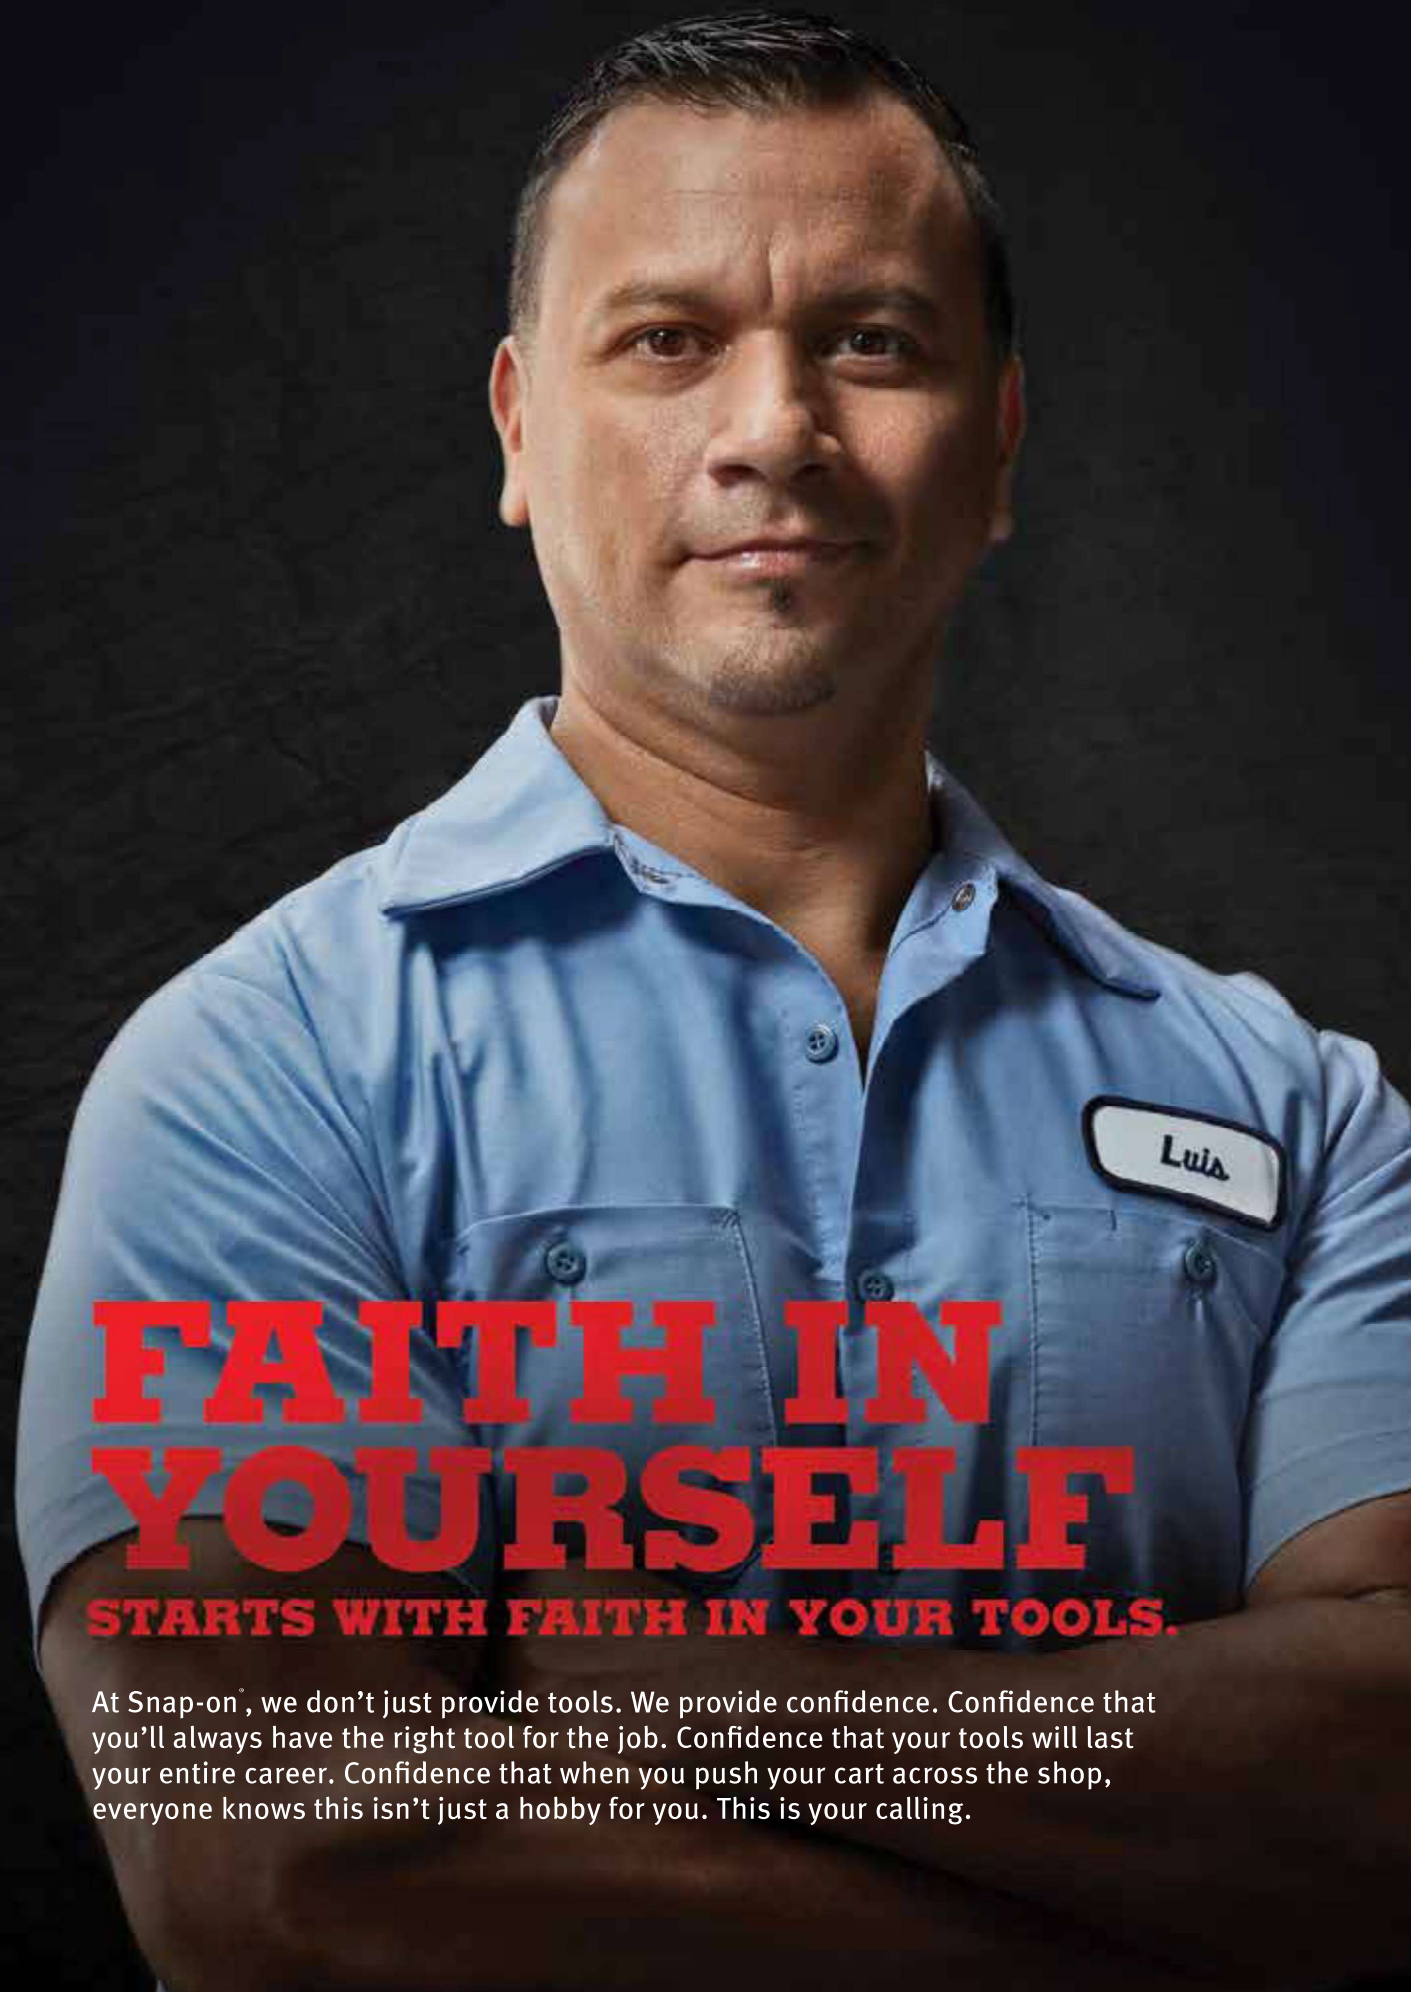

FAITH IN YOURSELF

STARTS WITH FAITH IN YOUR TOOLS.

At Snap-on®, we don't just provide tools. We provide confidence. Confidence that you'll always have the right tool for the job. Confidence that your tools will last your entire career. Confidence that when you push your cart across the shop, everyone knows this isn't just a hobby for you. This is your calling.